



The Intelligent simplicity

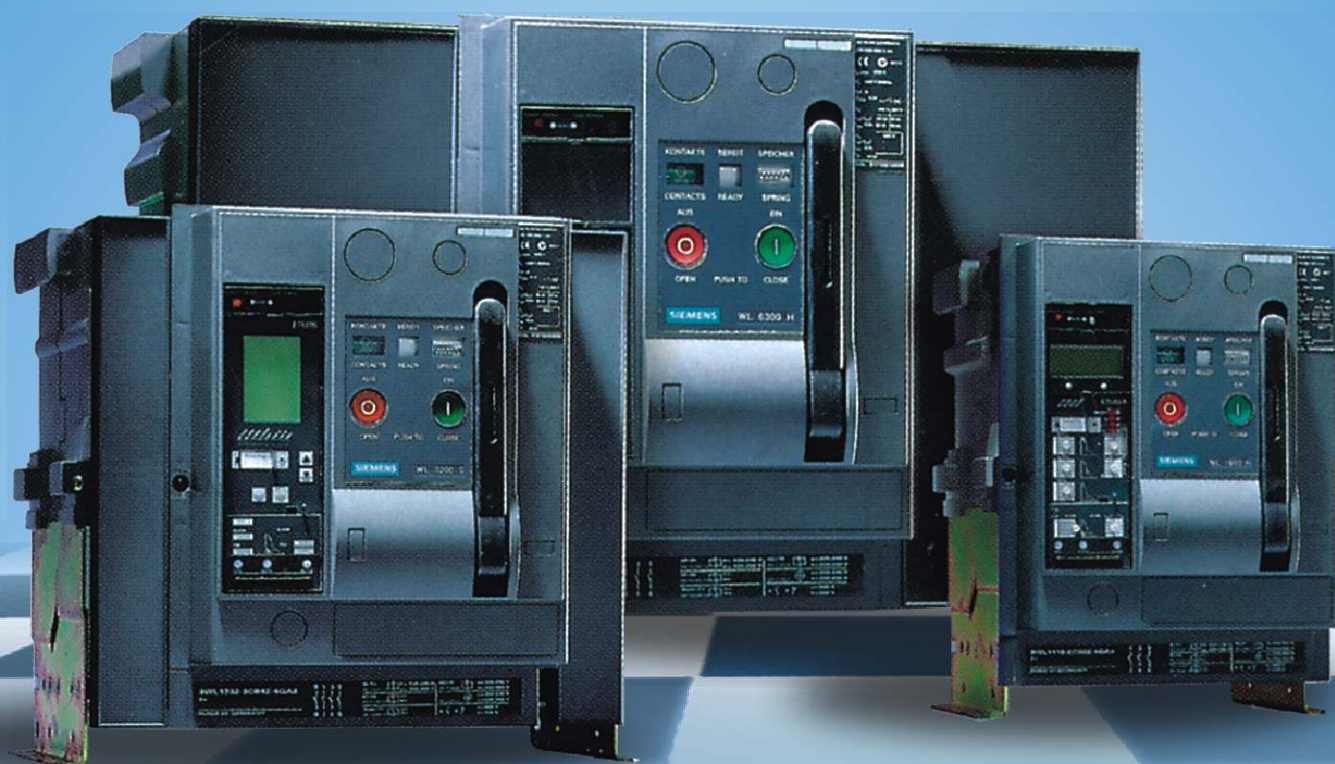


Datasheet

sentron
WL

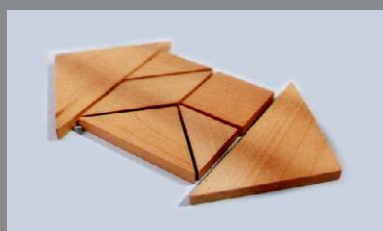

SIEMENS

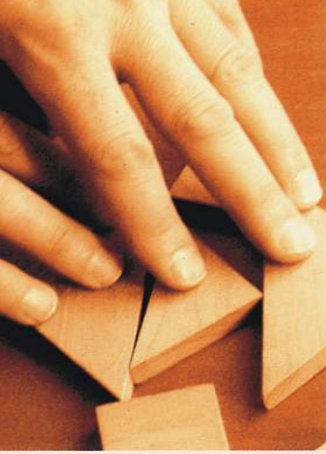

*Tangram, an ancient game:
The shapes are always the same-
the diversity is infinite*


Unlimited Possibilities Tangram

Tangram is an ancient Chinese game based on seven basic shapes.

A game which constantly challenges creativity of the player. It has been played all over the world and till date it has not lost its fascination. On the contrary its simplicity with creativity offers many options to the players.

Especially in our today's networked world, success increasingly depends on simple principles to build intelligence in our system.

Innovative Sentron 3WL circuit breakers are inspired by the puzzle Tangram to offer an ability to reduce complexity and parts yet offer enormous possibility to build cost effective, easy to plan, intelligent system solutions in power management to meet variety of demands.

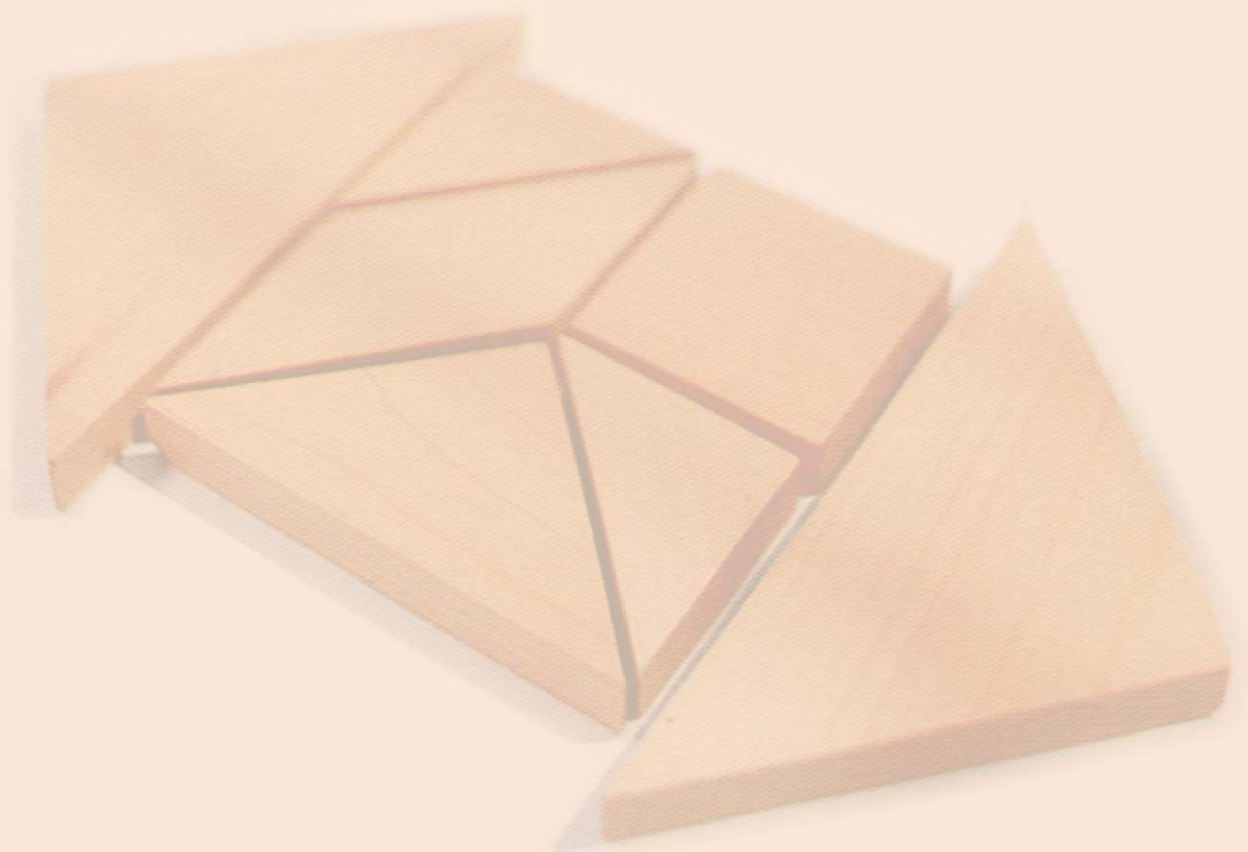

The Art of Intelligent Simplicity: Sentron WL

Circuit Breakers today are no longer simple switching and protecting devices with ON/OFF and trip indications. Users today are looking at circuit breakers as a device, which integrates switching, protection, metering, and power

management including quality of power from remote locations. Modern power systems are also characterized by the methods used to network circuit breakers - both with each other and with other components.

Siemens offers SENTRON WL family, which have a lot more to offer than even the so-called "the new circuit breaker" in the market. In future, it will not only be possible to carry out diagnosis and maintenance procedures remotely on the Internet, but real-time information about system mal-functions and alarm signals will be made available immediately to operating staff through SMS and mobile phones.

This is not a fantasy for the future; in fact it's hard reality.

This is Sentron. A new generation of circuit breakers from 100 A to 6300 A available in three different sizes with the following advantages.

Intelligent Modularity with Cost Savings:

- Same internal and external accessories for the entire range reducing inventory cost.
- Compact in size. A 6300 A 3WL requires only 800mm wide cabinet.
- Practically no deration till 55 Deg C with the permissible service temperature upto 70 Deg C. A 5000 A 3WL can deliver 5000 Amp even at 70 Deg C .
- High electrical life reduces the frequency of replacement of contacts.
- Unique rating plug facility allows a 3200 Amp 3WL to have thermal overload setting as low as 100A. This ensures complete protections even when the system is partially loaded.
- Integrated CubicleBUS provides unmatched flexibility and cost economic solutions to all panels - metering, protections and annunciations requirements.
- Sentron stands for complete energy management - solution for continuous energy cost, supervision and optimization - in short intelligent savings.



In essence, modularity means: User-friendly ease of planning, multiple use of standard configurations-also, simple management of changes and modification on site

"SENTRON - intelligent simplicity"




Easy Planning:

- Sentron WL is available in three frame sizes yet with identical door cutout for all the frames and at same locations on the breakers to ensure standardization, symmetry and aesthetics in panel design.
- Software such as Simaris designed to support you with evaluation, planning and calculation of the entire system, thus saving considerable time and energy in designing an electrical system.
- Contact erosion indicator on the main contacts will help to plan shutdown for the contact maintenance.
- 3 breakers frame size, 3 breaking capacity, single family and modular construction allows optimum selection of breaker.

Maximum Safety:

- Distinct mechanical ready to close indicator is provided as inherent safety feature. This ensures safe switching ON of ACB and eases the diagnosis. Ready to close interlocking will verify the following condition:
 - ☛ 3WL is switched OFF
 - ☛ Storage spring is charged
 - ☛ Undervoltage released is energized
 - ☛ Shunt trip not energized
 - ☛ Closing coil not energized

- ☛ No external interlocks activated
- ☛ Mechanical reclosing lockout reset.
- Crank release lever ensures breaker removal from the guide frame only when the contacts are separated.
- SAFE LOCK suitable for isolation. Castell key can be removed only when the contacts are separated.
- Lockable guide frame on removal of circuit breaker available as standard.
- Lockable withdrawable circuit breaker to protect against unauthorized removal provided as a standard
- High degree of IP protection class upto IP 55.
- Mechanical reclosing lock out after overload or short-circuit release as provided standard feature.
- The front cover cannot be removed if the circuit breaker is in closed condition.
- 3WL confirms to isolation requirement as per DIN EN 60 947 - 2

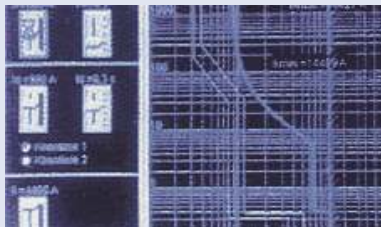

Whether for rapid retrofitting, reduced handling or optimal energy management-whoever chooses SENTRON will profit from clear and definite economic advantages

System Solutions:

- The Breaker Data Adapter(BDA) with integrated Web-server allows local parameterization, operation and observation of SENTRON circuit breaker. BDA plus provides additional Ethernet interface for remote diagnosis via LAN / WAN.

The Switch ES Power software with the same functionality via PROFIBUS - DP and with integrated object manager for integration of the SENTRON circuit - breakers into SIMATIC system and thus, the breaker can be accessed even remotely for diagnosis, parameterization and control, Important messages (e.g. Trip signal and reasons) can be transmitted by SMS to the cell phone of plant personnel.

- SENTRON WL can simultaneously exchange the data with two master and the high transmission rate of 12 Mega bytes / sec ensures virtually real time system operations.

Easy Operations / Easy Maintenance:

- Innovative drawout mechanism with integral crank handle.
- Click - fit front accessories.
- Built - in test features permits testing of the breakers without any additional test kit.

Sentron WL : A single family in three different size, from 100 to 6300 A.

Circuit Breaker rated current In max (A)	Breaking capacity In at 440 V AC (kA)	Dimensions		
		Fixed mounted 3- /4-pole	Draw-out 3- /4-pole	
Size III 		704 / 914	704 / 914	Width
		434 / 434	460 / 460	Height
		291 / 291	385 / 385	Depth
Size II 		460 / 590	460 / 590	Width
		434 / 434	460 / 460	Height
		291 / 291	385 / 385	Depth
Size I 		320 / 410	320 / 410	Width
		434 / 434	460 / 460	Height
		291 / 291	385 / 385	Depth

* 1) Available only for 2000 & 2500 Amp ratings

Standards :- The Sentron WL Circuit - breakers Satisfy :

- IEC 60947 - 2, IS 13947 - 2
- DIN VDE 0660 Part 101
- UL 489 / ANSI C 37.13, UL 1066
- Climate Proof according to DIN IEC 68 Part 30 - 2
- CE Conformance
- Lloyd's Register of shipping





Setting the benchmark:
With solutions based on SENTRON
Strong as individual products -
unsurpassed within communication
structures: SENTRON WL and VL



User-friendly and precise:
Planning with SENTRON



Technical Overview : SENTRON

Size Type			I			II			
			up to 3WL11 10	3WL 11 12	3WL 11 16	3WL 12 08	3WL 12 10	3WL 12 12	3WL 12 16
Rated current I _n at 55°C, at 50/60 Hz									
Main conductor	A		up to 1000	1250	1600	800	1000	1250	1600
N-conductor (only with 4 poles)	A		up to 1000	1250	1600	800	1000	1250	1600
Rated operational voltage U _e at 50/60 Hz		AC V	up to 690	up to 690	up to 690	up to 690/ 1000	up to 690/ 1000	up to 690/ 1000	up to 690/ 1000
Rated insulation voltage U _i		AC V	1000	1000	1000	1000	1000	1000	1000
Rated impulse withstand voltage U _{imp}									
Main conducting paths	kV		12	12	12	12	12	12	12
Auxiliary circuits	kV		4	4	4	4	4	4	4
Control circuits	kV		2.5	2.5	2.5	2.5	2.5	2.5	2.5
Isolating function according to DIN EN 60 947-2			yes	yes	yes	yes	yes	yes	yes
Utilization category			B			B			
Permissible ambient temperature									
Operation	°C		-25/+70	-25/+70	-25/+70	-25/+70	-25/+70	-25/+70	-25/+70
Storage	°C		-40/+70	-40/+70	-40/+70	-40/+70	-40/70	-40/+70	-40/+70
Permissible load	up to 55° C	A	1000	1250	1600	800	1000	1250	1600
for rear horizontal	up to 60° C	A	1000	1250	1600	800	1000	1250	1600
main contacts	up to 70° C	A	1000	1210	1490	800	1000	1250	1600
Rated short circuit making capacity I _{cm} (peak) kA		Rating Class ²⁾	N	/	S	S	/	H	
		upto 440V	105	/	143	176	/	220	
		upto 690V	88	/	105	165	/	187	
		upto 1000V	-	/	-	-	/	95	
Rated service short circuit breaking capacity, I _{cs} (r.m.s) kA (I _{cs} = I _{cu})		Rating Class ²⁾	N	/	S	S	/	H	
		upto 440V	50	/	65	80	/	100	
		upto 690V	42	/	50	75	/	85	
		upto 1000V		/	-	/	45		
Rated short time withstand current, I _{cw} kA For 1 Sec at 50/60 Hz		Rating Class ²⁾ 1 Sec Rating	N 42	/ /	S 50	S 65	/ /	H 80	
Power loss at I _n with 3-phase symmetrical load									
Fixed-mounted circuit-breaker	W		100	105	150	40	45	80	85
Withdrawable circuit-breaker	W		195	205	350	85	95	165	175
Operating times									
Make-time	ms		35	35	35	35	35	35	35
Break-time	ms		38	38	38	34	34	34	34
Endurance									
Mechanical (without maintenance)	operating cycles		10 000	10 000	10 000	10 000	10 000	10 000	10 000
Mechanical (with maintenance)	operating cycles		20 000	20 000	20 000	15 000	15 000	15 000	15 000
Electrical (without maintenance)	operating cycles		10 000	10 000	10 000	75 00	75 00	75 00	75 00
1000 V version	operating cycles		-	-	-	1000	1000	1000	1000
Electrical (with maintenance)	operating cycles		20 000	20 000	20 000	15 000	15 000	15 000	15 000
Switching frequency									
690 V version	1/h		60	60	60	60	60	60	60
1000 V version	1/h		-	-	-	20	20	20	20
Minimum interval		ms	80	80	80	80	80	80	80
Between release by overcurrent release and next closing of the circuit-breaker (only with autom mechanical reset of the reclosing lockout)									
Mounting position									
Degree of protection			upto IP 55			upto IP 55			
Weights 3-pole	Fixed-mounted circuit-breaker	kg	43	43	43	56	56	56	56
	Withdrawable circuit-breaker	kg	45	45	45	60	60	60	60
	Guide frame	kg	25	25	25	31	31	31	31
4-pole	Fixed-mounted circuit-breaker	kg	50	50	50	67	67	67	67
	Withdrawable circuit-breaker	kg	54	54	54	72	72	72	72
	Guide frame	kg	30	30	30	37	37	37	37

SENTRON WL: An air circuitbreaker family for the complete spectrum of power distribution whether in building infrastructure or industrial applications.

WL Air Circuit Breakers



Size Type			3WL 12 20	II 3WL 12 25	3WL 12 32	3WL 13 40	III 3WL 13 50	3WL 13 63
Rated current I_n at 55°C, at 50/60 Hz								
Main conductor	A		2000	2500	3200	4000	5000	6300 ¹⁾
N-conductor (only with 4 poles)	A		2000	2500	3200	4000	5000	6300
Rated operational voltage U_e at 50/60 Hz								
	AC V		up to 690/ 1000	up to 690/ 1000	up to 690/ 1000	up to 690/ 1000	up to 690/ 1000	up to 690/ 1000
Rated insulation voltage U_i								
	AC V		1000	1000	1000	1000	1000	1000
Rated impulse withstand voltage U_{imp}								
Main conducting paths	kV		12	12	12	12	12	12
Auxiliary circuits	kV		4	4	4	4	4	4
Control circuits	kV		2.5	2.5	2.5	2.5	2.5	2.5
Isolating function according to DIN EN 60 947-2			yes	yes	yes	yes	yes	yes
Utilization category			B			B		
Permissible ambient temperature								
Operation	°C		-25/+70	-25/+70	-25/+70	-25/+70	-25/+70	-25/+70
Storage	°C		-40/+70	-40/+70	-40/+70	-40/+70	-40/+70	-40/+70
Permissible load								
up to 55° C	A		2000	2500	3200	4000	5000	5920
for rear horizontal up to 60° C	A		2000	2500	3070	4000	5000	5810
main contacts up to 70° C	A		2000	2280	2870	4000	5000	5500
Rated short circuit making capacity I_{cm} (peak) kA Rating Class²⁾								
upto 440V			N / S / H		S / H		H	
upto 690V			121 / 176 / 220		176 / 220		220	
upto 1000V			105 / 165 / 187		165 / 187		187	
			- / - / 95		- / 95		105	
Rated service short circuit breaking capacity, I_{cs} (r.m.s) kA (I_{cs} = I_{cu}) Rating Class²⁾								
upto 440V			N / S / H		S / H		H	
upto 690V			55 / 80 / 100		80 / 100		100	
upto 1000V			50 / 75 / 85		75 / 85		85	
			- / - / 45		- / 45		50	
Rated short time withstand current, I_{cw} KA For 1 Sec at 50/60 Hz Rating Class²⁾								
			N / S / H		S / H		H	
			55 / 65 / 80		65 / 80		80 ³⁾ / 100 ⁴⁾	
Power loss at I_n								
with 3-phase symmetrical load								
Fixed-mounted circuit-breaker	W		180	270	410	520	630	900
Withdrawable circuit-breaker	W		320	520	710	810	1050	1600
Operating times								
Make-time	ms		35	35	35	35	35	35
Break-time	ms		34	34	34	34	34	34
Endurance								
Mechanical (without maintenance)	operating cycles		10 000	10 000	10 000	5000	5000	5000
Mechanical (with maintenance)	operating cycles		15 000	15 000	15 000	10 000	10 000	10 000
Electrical (without maintenance)	operating cycles		75 00	7500	4000	2000	2000	2000
1000 V version	operating cycles		1000	1000	1000	1000	1000	1000
Electrical (with maintenance)	operating cycles		15 000	15 000	15 000	10 000	10 000	10 000
Switching frequency								
690 V version	1/h		60	60	60	60	60	60
1000 V version	1/h		20	20	20	20	20	20
Minimum interval								
	ms		80	80	80	80	80	80
Between release by overcurrent release and next closing of the circuit-breaker (only with autom mechanical reset of the reclosing lockout)								
Mounting position								
Degree of protection			upto IP 55			upto IP 55		
Weights								
3-pole	Fixed-mounted circuit-breaker	kg	56	59	64	82	82	90
	Withdrawable circuit-breaker	kg	60	63	68	88	88	96
	Guide frame	kg	31	39	45	60	60	70
4-pole	Fixed-mounted circuit-breaker	kg	67	71	77	99	99	108
	Withdrawable circuit-breaker	kg	72	76	82	106	106	108
	Guide frame	kg	37	47	54	84	84	119

* 1) At 40°C

* 2) N-Normal; S-Standard; H-High

* 3) Size III with $I_{nmax} \leq 5000A$

* 4) Size III with $I_{nmax} 6300A$

3- and 4 pole, up to 6300 A fixed - mounted and withdrawable version

Description

Electronic over current release (ETU)

During the development of our electronic over-current release we have consistently striven to ensure modularity. The following are just some modules that are simple to retrofit at any time

- Earth-fault protection module.
- Communication modules.
- Metering function
- Displays
- Rating plugs

This enables fast local adaptation to new network conditions. At the same time, the ETUs are provided with new, innovative functions like:-

Rating Plug

The Rating Plug is a replaceable module that enables users to reduce the rated device current for optimum adaptation to the system; e.g. during startup of a plant section. The Rating Plug should be selected so that it roughly corresponds to the rated current of the system.

Switch - selectable I^2t or I^4t characteristic curve for the overload range.

The best possible protection for the overall switchgear assembly is achieved by ensuring optimum setting of the release characteristic. To achieve optimum selectivity of the upstream fuses or medium-voltage protective devices, the inclination of the characteristic curve can be switched over in the overload range.

Switch - selectable parameters


In the event of a sudden change in network conditions e.g. switchover of the transformers to generator operation or shut down of a part of the supply network at the change of shift, SENTRON WL now supports fast adaptation of the required protective parameters to the new circumstances.

Two release characteristics (parameter sets) that are independent of one another are stored on the ETUs. The transfer is executed in under 100ms and is initiated by an external signal.

Rating Plug I_n

size I	size II	size III
250A	250A	
315A	315A	
400A	400A	
500A	500A	
630A	630A	
700A	700A	
800A	800A	
1000A	1000A	
1250A	1250A	1250A
1600A	1600A	1600A
	2000A	2000A
	2500A	2500A
	3200A	3200A
		4000A
		5000A
		6300A


Sample configuration of an ETU 45B

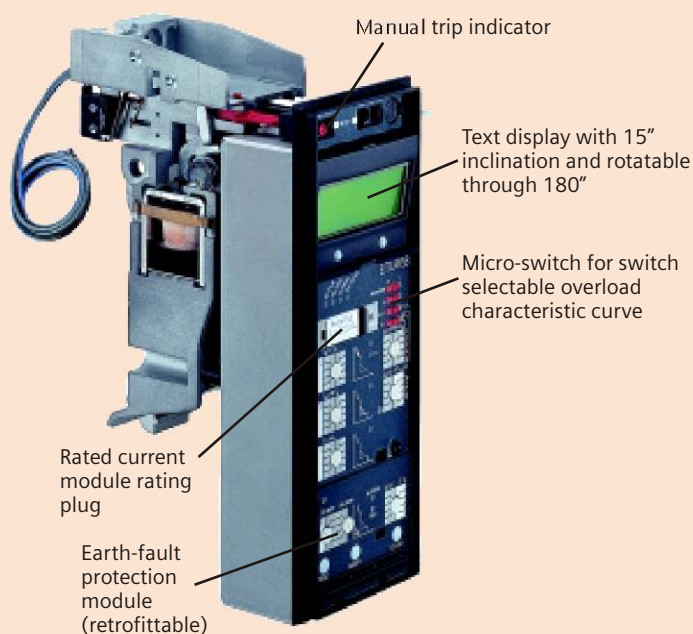

example : 1000A - 3WL -> up to 1000A

rating Plug 250A ; I_r setting = $0.4 \times 250 = 100A$

Overcurrent release ETU 45B

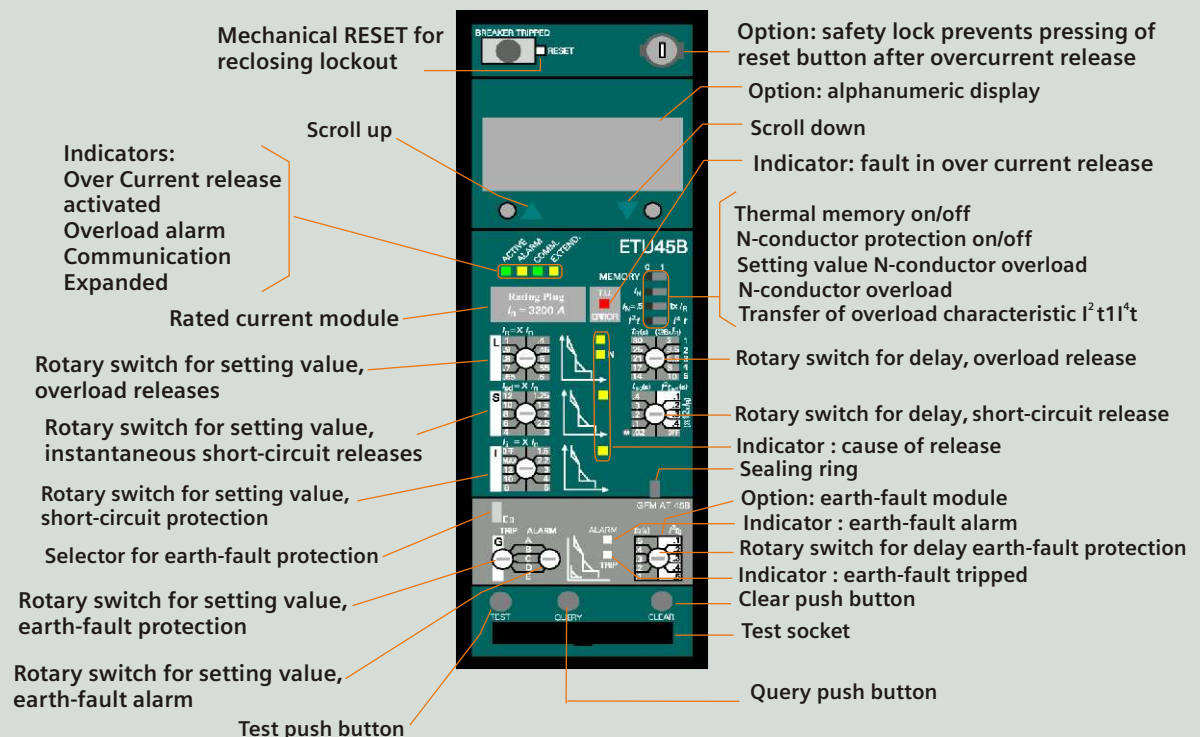


Application:

Cost-effective intelligent allrounder for building and all types of industrial applications- "Cubicle BUS integrated"

Properties:

1. Adjustable time-lag class for overload protection
2. Short-time delayed short-circuit protection, adjustable from $1.25 \dots 12 \times I_n$
3. Instantaneous short-circuit protection adjusting $12 I_n / \text{Max} / \text{Off}$
4. Replaceable Rating Plug allows instant adaptability to required plant currents, thus ensuring overload protection of 100 A to 6300 A.
5. Switch-selectable characteristic of the overload and short- time delay short-circuit range(current discriminate)for finer selectivity conditioning to downstream fuses or protective devices
6. Thermal memory as restart protection in case of tripped motor circuits
7. Connectable and adjustable neutral conductor protection
8. Modular earth-fault protection, with separately adjustable alarm and trip function
9. Communication interface, metering function (Plus), connection of external modules as option or retrofit option.
10. Optional high-contrast display with viewing angle adjustment
11. Overload indicator
12. Display of cause of release through LED
13. Option for testing the release
14. Setting of protective functions by means of rotary or slide switch.

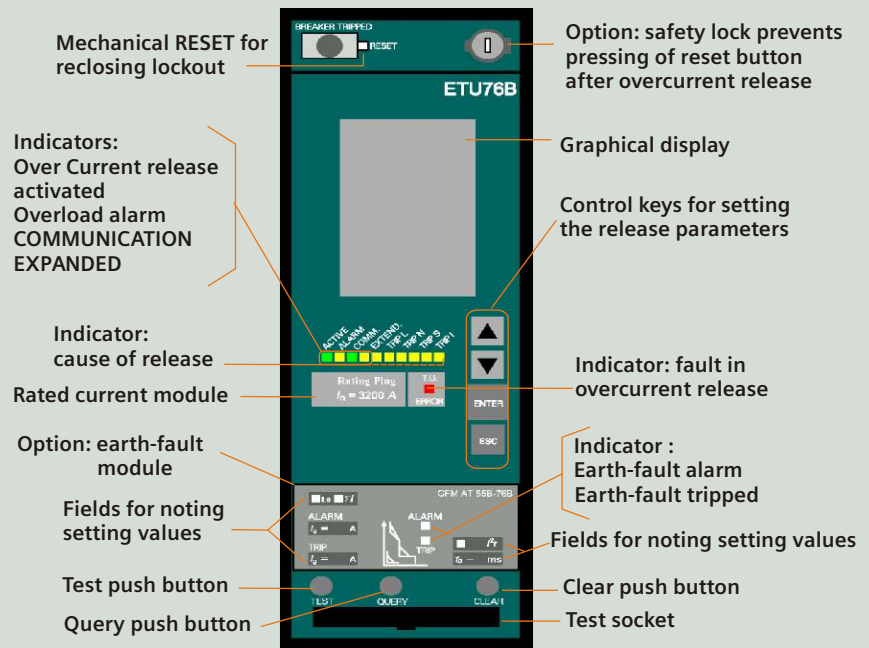

Application:

The multitalent with graphical display for network analysis- "CubicleBUS integrated".


Properties:

As for ETU45B plus the following:

1. Two protective parameter steps that can be stored separately in the release (switch-selectable through external signal).
2. Overload protection that can be switched off for use with modern operating mechanism.
3. Adjustable lag of the delayed short-circuit protection up to 4000ms.
4. Neutral conductor protection adjustable to $I_n = 2 I_n$.
5. Setting of protective functions by means of control keys or Breaker Data Adapter or through communication interface.
6. Graphical display of all parameters and event/curve characteristics.
7. Storage of events and causes of release for specific error analysis.
8. High-contrast background -lit graphical display with sleep mode.



SELECTION OF THE OVERCURRENT RELEASES

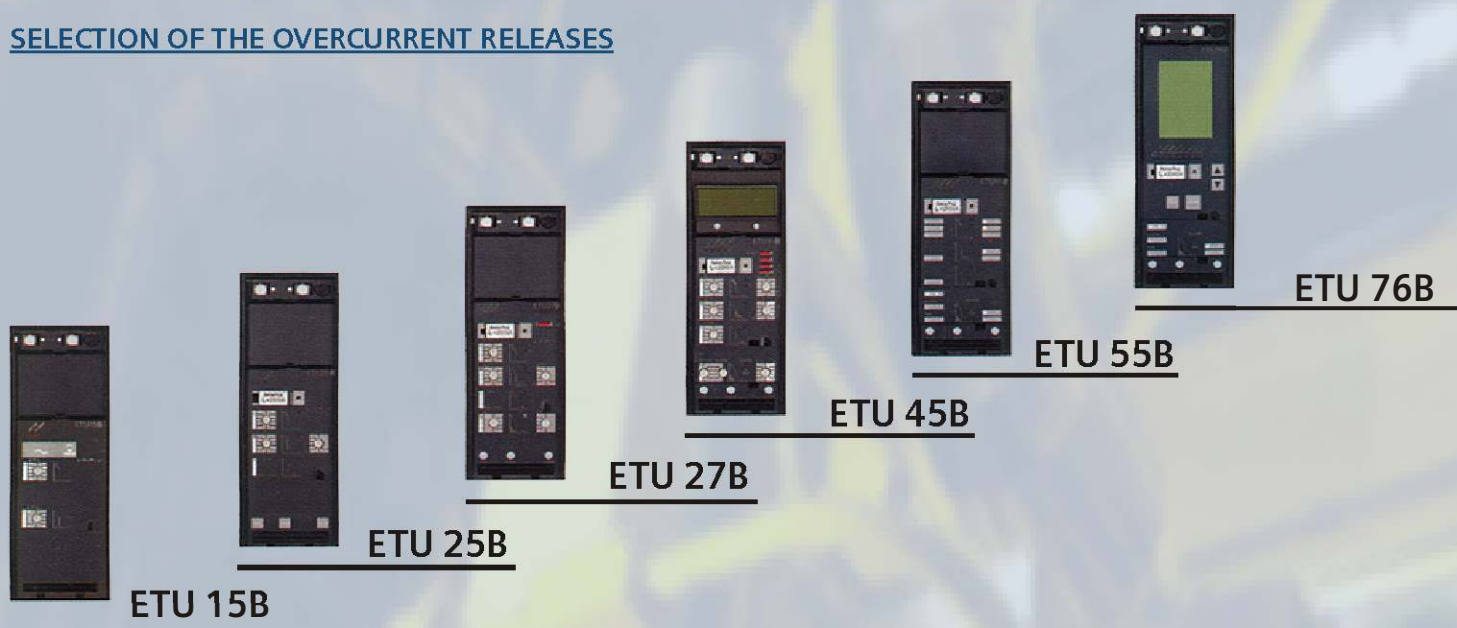

Ranges / Functions	Overload protection	Short-time delayed short-circuit protection	Instantaneous short-circuit protection	Protection of neutral conductor	Earth-fault protection	ZSI (zone-selective interlocking)	LCD 4 lines	LCD graphic	Communication via Profibus DP	Metering functions	Selectable parameter sets	Freely programmable parameters
ETU 15B	✓	—	✓	—	—	—	—	—	—	—	—	—
ETU 25B	✓	✓	✓	—	—	—	—	—	—	—	—	—
ETU 27B	✓	✓	✓	✓	✓	—	—	—	—	—	—	—
ETU 45B	✓	✓	✓	✓	○	○	○	—	○	○	—	—
ETU 55B	✓	✓	✓	✓	○	○	—	—	○	○	✓	✓
ETU 76B	✓	✓	✓	✓	○	○	—	✓	○	○	✓	✓

✓ Available — not available ○ optional

Tripping characteristics


Every release type and every setting has its own characteristic. You will find just a small selection of these illustrated below. The characteristics show the respective greatest and smallest setting range of SENTRON WL circuit-breakers with 1000A rated current, 690V rated voltage with various releases.

The characteristics show the behavior of the overcurrent release when it is activated by a current already flowing before the release. If the overcurrent release is not activated, the opening time is


prolonged up to 15ms, depending on the value of the overcurrent. To determine the total break-times of the circuit-breakers about 15ms must be added to the displayed opening times for the arc duration.

The displayed characteristics apply for ambient temperature at the circuit-breaker of - 5 to + 55 Deg C. The release can be operated at ambient temperatures of - 20 to + 70 Deg C.


SENTRON WL circuit-breakers with I = 1000 A and ETU 45B or ETU 55B
electronic release
Inverse-time delayed overload range L

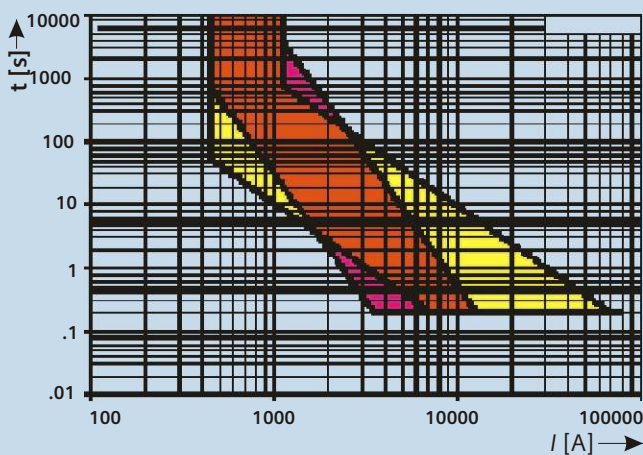


SENTRON WL circuit-breakers with I = 1000 A and ETU 45B or ETU 55B
electronic release
Instantaneous short-circuit range I

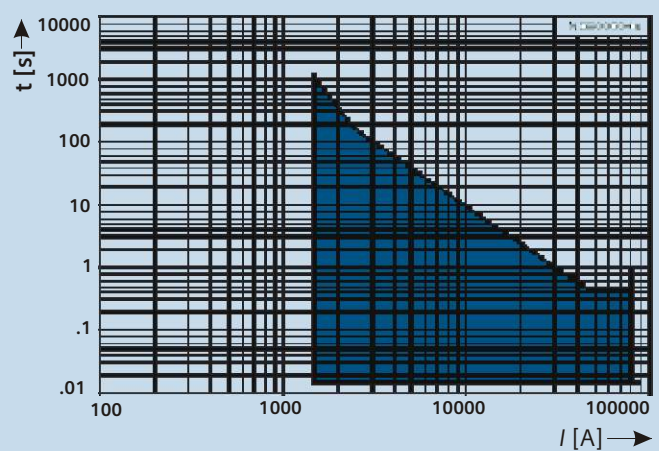

SENTRON WL circuit-breakers with I = 1000 A and ETU 45B or ETU 55B
electronic release
Earth-fault protection range G

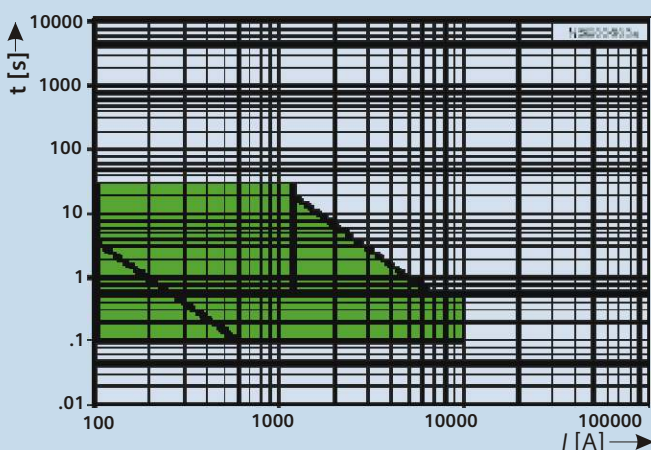

SENTRON WL circuit-breakers with I = 1000 A and ETU 45B or ETU 55B
electronic release
Short-time delayed short-circuit range S

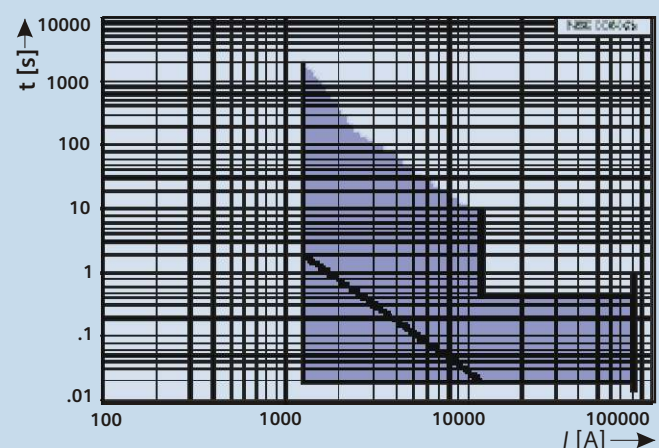

- Inverse-time delayed overload range L $I^2t = \text{constant}$
- Overlapping of the Inverse-time delayed overload range L I^2t and I^4t
- Inverse-time delayed overload range L $I^4 = \text{constant}$
- Short-time delayed short-circuit range S
- Instantaneous short-circuit range I
- Earth-fault protection range G

You will find further characteristics in the manual or in the SIMARIS deSign planning and configuring tool. Or if you have any further queries, please contact your partner.

Cost Saving

Simple, rapid retrofitting

Reduced parts variance

No derating till 55° C

High power rating - low
space requirement

Perfectly Modular

Circuit-breakers from
100A to 6300A

Simple planning with
SIMARIS design

Easy Planning

System Solutions


State-of-the-art communication

Diagnosis also possible via
the Internet

Power Management


Customised solutions: SENTRON WL

- ① Draw-Out-Frame
- ② Main Terminals Front, Flange, Horizontal, Vertical
- ③ Position-Indicating Switches
- ④ Leading Earth Contact
- ⑤ Shutters
- ⑥ COM 15 PROFIBUS Module
- ⑦ External CubicleBUS Module
- ⑧ Closing Coil, Auxiliary Releases
- ⑨ Auxiliary Plug-in System
- ⑩ Auxiliary Contact Block
- ⑪ Door Sealing Frame
- ⑫ Interlocking Kit
- ⑬ Transparent Cover, Function Block
- ⑭ Emergency Stop Pushbutton, Key Operator
- ⑮ Motorized Operator
- ⑯ Switch Operation Counter
- ⑰ Breaker Status Sensor (BSS)
- ⑱ Electronic Trip Unit (ETU)
- ⑲ Reset Coil
- ⑳ Breaker Data Adapter (BDA)
- ㉑ Four line LCD Module
- ㉒ Earth-Fault Protection Module
- ㉓ Rating Plug Module
- ㉔ Metering Module
- ㉕ Sentron WL Circuit-Breaker

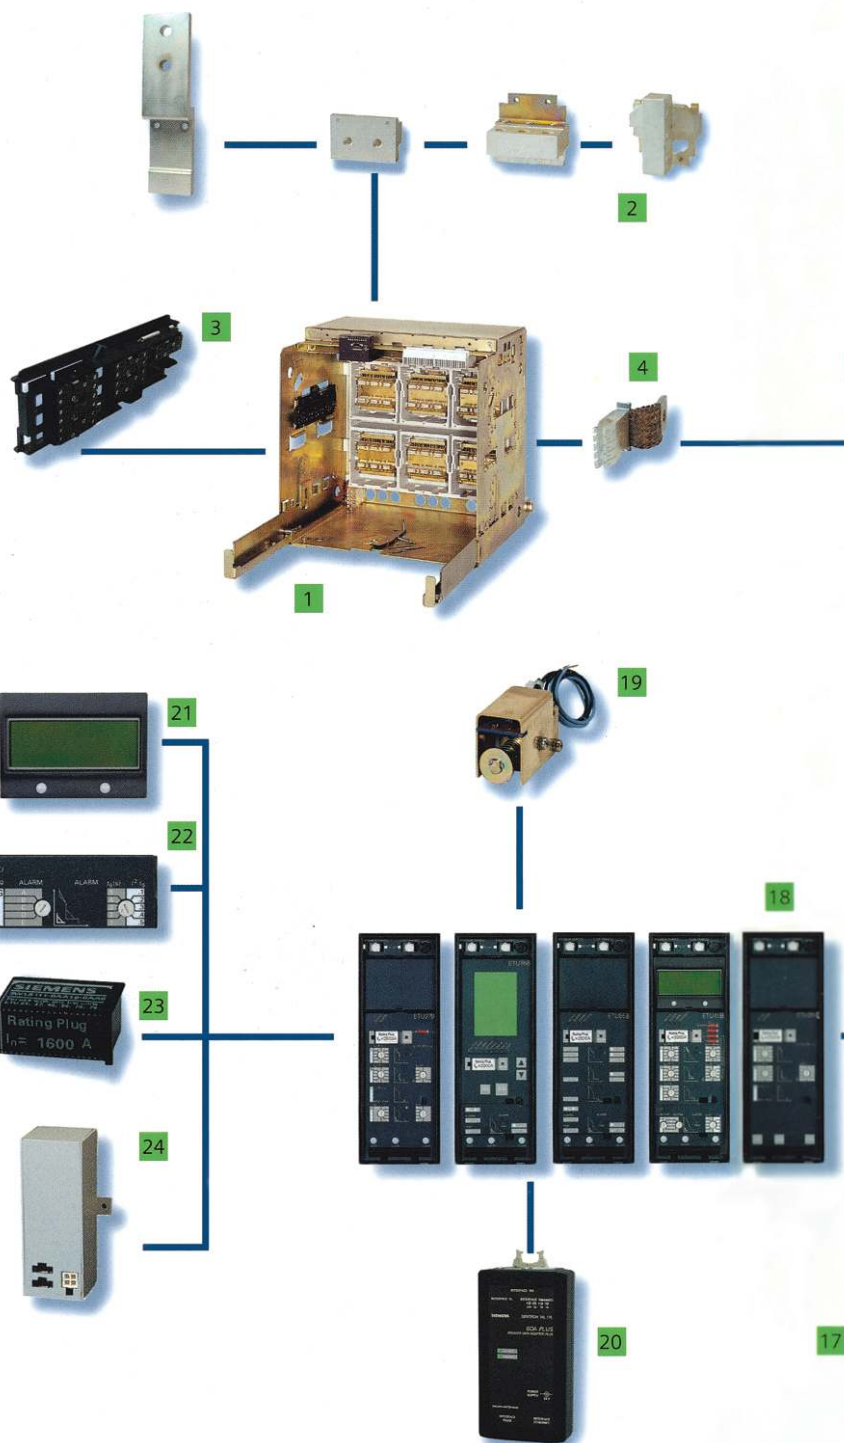

with optional accessories


SENTRON WL: superior individual products, integrated into comprehensive power distribution system-to the extent of providing solutions specific to particular industrial sector and infrastructure projects

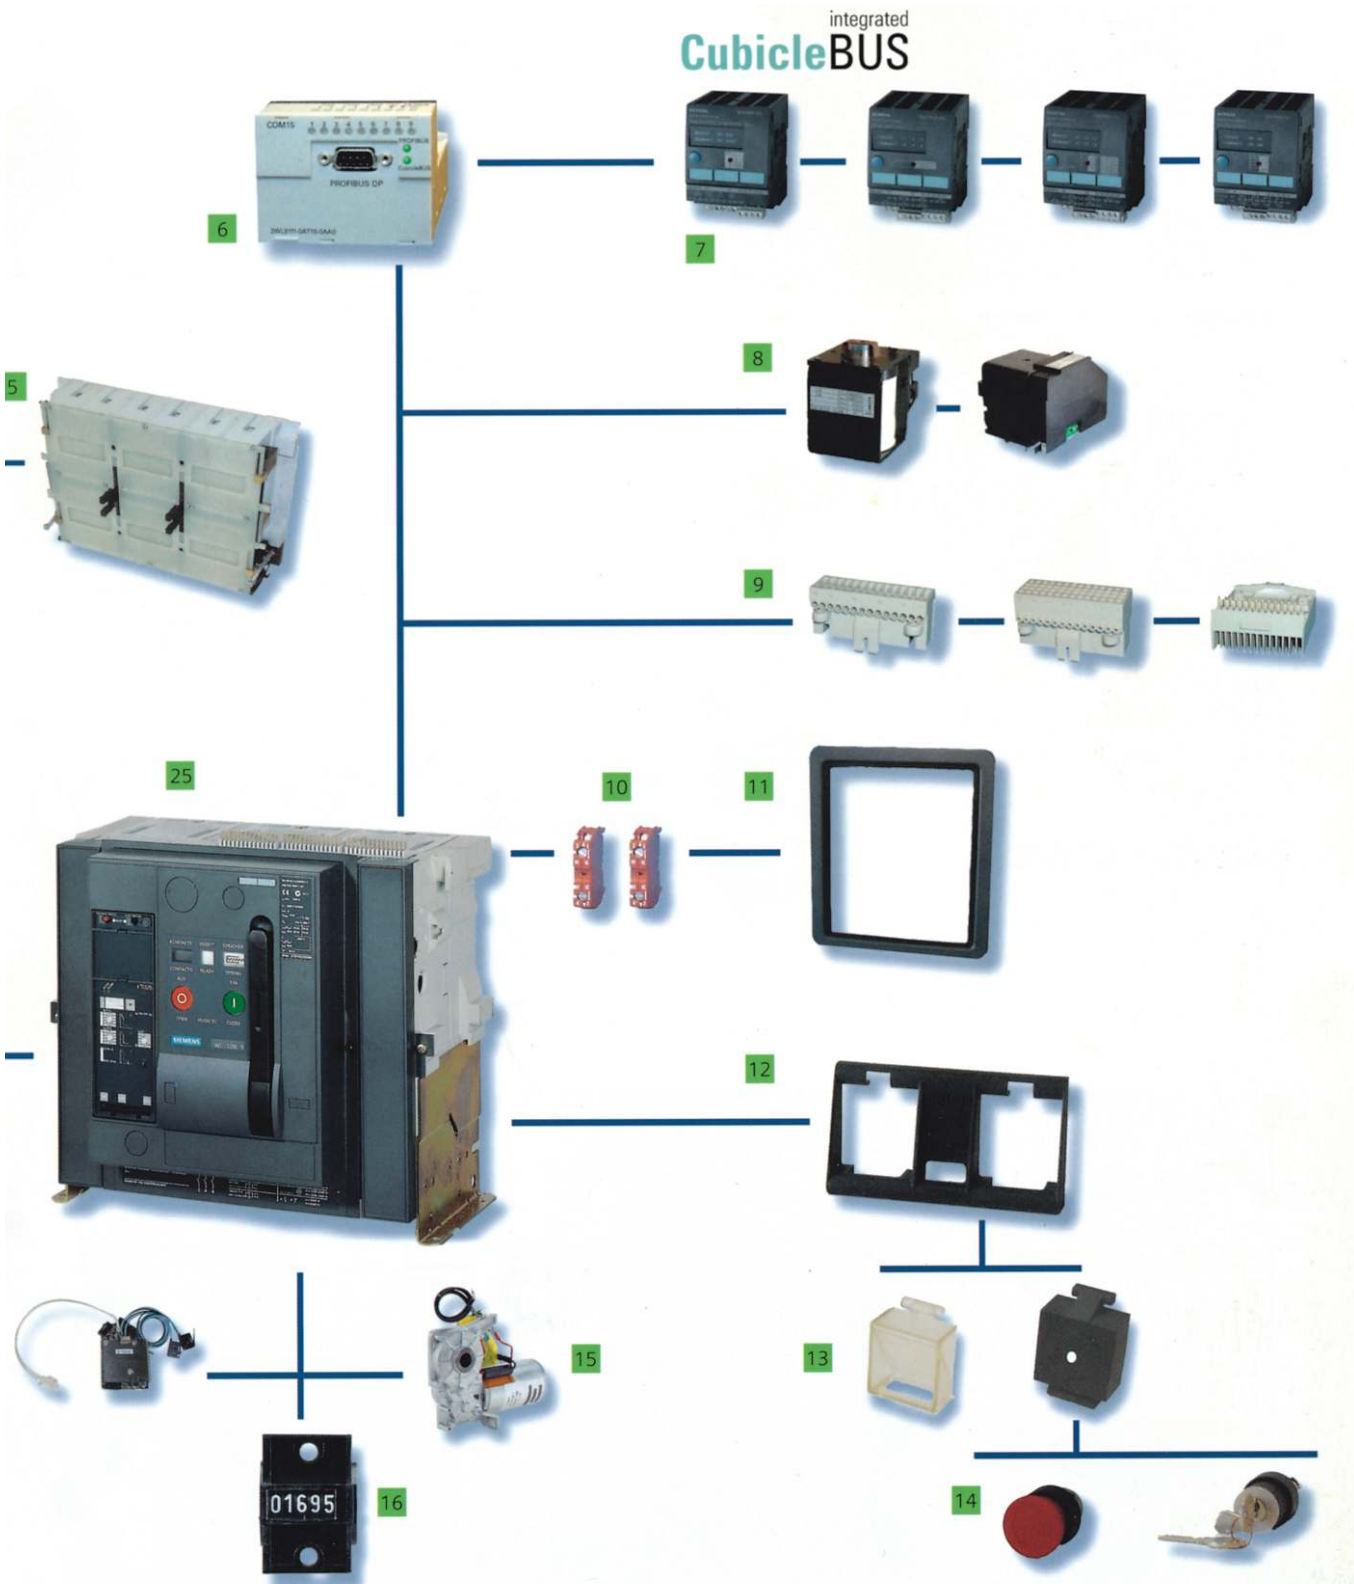

3- and 4 pole, up to 6300 A fixed - mounted and withdrawable version

Description


CIRCUIT-BREAKERS

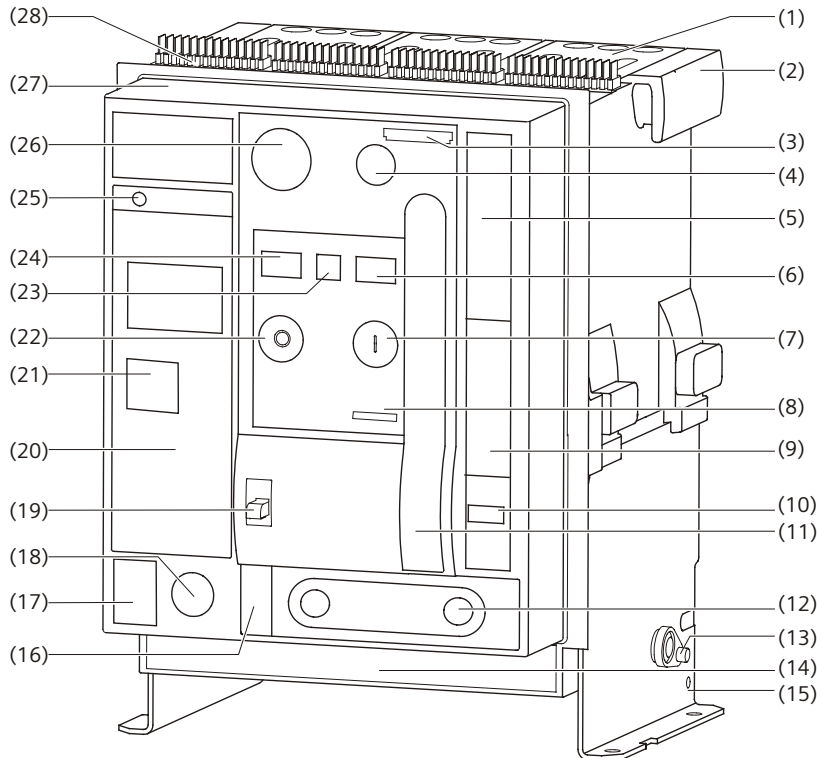

- 1) Arc chute
- 2) Handle
- 3) ID label
- 4) Motor switch (optional) or "electrical ON" (optional)
- 5) Type label of circuit-breaker
- 6) Spring charge indicator
- 7) "Mechanical ON" button
- 8) Rated current data
- 9) Insertion pogrammm
- 10) Operating cycle counter (optional)
- 11) Charging lever
- 12) Crank handle
- 13) Transport shalt for withdrawable unit
- 14) Equipment label
- 15) Earth terminal
- 16) Position indicator
- 17) Earth fault protection table
- 18) Crank handle safety lock
- 19) "Mechanical OFF" button or "emergency OFF" mushroom push button (optional)
- 20) Ready-to-close indicator
- 21) Contact position indicator
- 22) Trip indicator (reset button)
- 23) Locking device "Safe OFF" (optional)
- 24) Front panel
- 25) Terminal strip for auxiliary contacts

Description

GUIDE FRAME

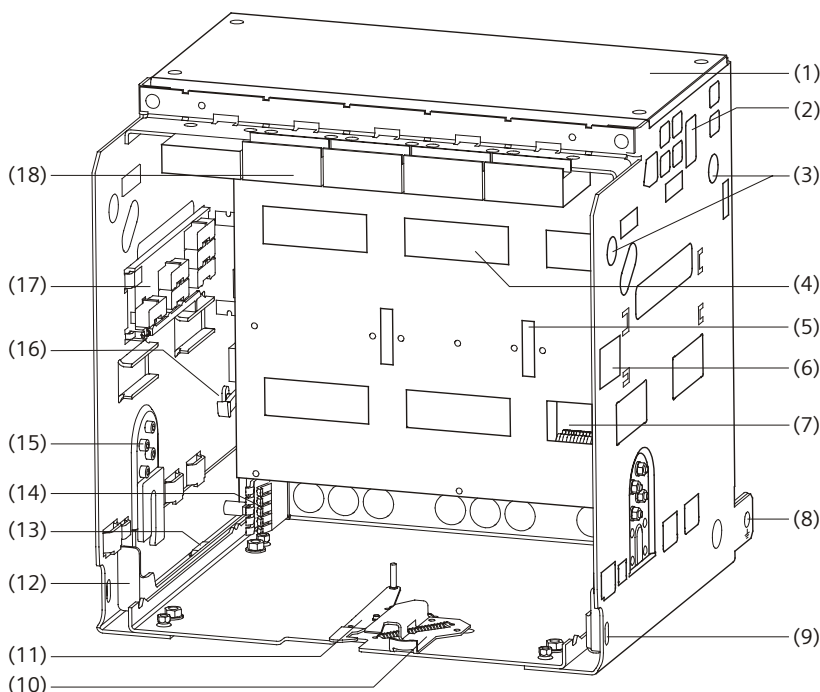

- 1) Arc chute cover (optional)
- 2) Arcing openings
- 3) Opening for crane hooks
- 4) Shutter (optional)
- 5) Locking device (shutter) (optional)
- 6) Type label for guide frame
- 7) Disconnecting contact
- 8) Earthing terminal $\phi 14$ mm
- 9) Locking device travel rail
- 10) Locking device against moving if the cubicle door is open (optional)
- 11) Door interlock for guide frame (optional)
- 12) Guide rail
- 13) Ampere rating coding by factory
- 14) Sliding contact for circuit-breaker earthing (optional)
- 15) Option related coding
- 16) Shutter operating device (optional)
- 17) Position signal switch (optional)
- 18) Sliding contact module for auxiliary conductor (quantity is equipment-dependent)

Description

Auxiliary release

Up to two auxiliary releases can be installed at the same time. The following are available:

1 shunt release or 1 undervoltage release or 2 shunt releases or 1 shunt release + 1 undervoltage release.

Shunt release

The shunt release instantly turns off the circuit-breaker when the working voltage is applied. The shunt release "F1" is available in two versions; 5% duty ratio for over excitation and 100% duty ratio for permanent-magnet excitation. This can be used as lock-out against startup.

An energy storage device for the shunt release allows the circuit-breaker to be turned off after a control voltage failure.

Undervoltage release

The undervoltage release turns off the circuit-breaker when the working voltage falls below a specific value or is not applied. The circuit-breaker cannot be switched ON manually or by means of an electrical ON command if the undervoltage release is not applied to the rated voltage. The under voltage release "Y1" is without time lag as standard and the customer can switch between $t_1 < 80\text{ms}$ and $t_1 < 200\text{ms}$.

A further version is available : undervoltage release with 0.2 to 3.2 s lag.

Signal contact for auxiliary release.

One signal contact per auxiliary release is available to interrogate the switching positions of the auxiliary release.

Closing solenoid

Serves to electrically close the circuit-breaker by means of a local or remote electrical "ON" button.

Motorized operating mechanism

For automatic charging of the stored energy mechanism.

Is switched on when the stored energy mechanism is released and the control voltage is available.

Automatically switch off after charging. Manual actuation of the storage can function independently.

Display message and control elements

Interlocking set

The interlocking set is required when the operability of the mechanical ON and OFF buttons need to be adapted to special demands of the switchgear

operation by retrofitting various accessories (e.g. Safety locks, access lock-outs preventing tool operation, seals.)

Motor switch

Knob-operated switch for turning off the motorized operating mechanism.

Operating cycle counter

A 5-digit operating cycle counter is available with the motorized operating mechanism. The display is incremented by "1" as soon as the stored energy mechanism is fully charged.

Resetting the manual trip signal

If the circuit-breaker has been tripped, this is indicated by the protruding red reset button on the ETU. Actuation of the reset button resets the trip solenoid and the trip signal. If this manual indicator is to be remotely reset, the option is available to equip the reset button with a reset solenoid.

With this option, the circuit-breaker can be reset both manually and electrically.

Automatic reset of the reclosing lockout

If the ETU is released the circuit-breaker cannot be reclosed until the release has been either electrically or manually reset

With the option "automatic reset of the reclosing lockout", the circuit-breaker is ready-to-close immediately after a release. The reset of the manual trip indicator is not contained in this option.

Trip signal switch

If the circuit-breaker is tripped through overload, short-circuit or earth fault, this can be indicated by the trip signal switch. This signal switch is available as an optional extra. If the circuit-breaker is communication capable, this option is available as standard.

Ready-to-close- signal contact

The SENTRON WL circuit-breakers are equipped with a visual ready-to-close facility as standard. The option to transmit this readiness to close over a signal contact is also available. If the circuit-breaker is operated through communication, this signal switch is fitted as standard.

Locking device in OFF position

This function prevents the circuit-breaker being closed and fulfils the main switch-characteristics according to EN 60 204 (VDE 0113)- line disconnecter. This locking only affects this circuit-breaker.

After a circuit-breaker is replaced, it is no longer possible to prevent it being closed unless the new circuit-breaker is also protected against unauthorized closing.

To activate the locking device, the circuit-breaker must be open. If the circuit-breaker is closed, the locking device is blocked. The blocking is only effective if the key is withdrawn. The safety key can only be withdrawn in the "OFF" position.

Locking device for "electrical ON"

Prevents unauthorized electrical closing at the front panel. Mechanical and remote closing are still possible. The blocking is only effective if the key is withdrawn.

Locking device for "mechanical ON"

Prevents unauthorized mechanical closing. The mechanical ON button can only be actuated if the key is inserted (key operation). Closing through the "electrical ON" or remote closing are still possible. The blocking is only effective if the key is withdrawn.

"Safe OFF" switch independent locking device against unauthorized closing.

This special function for withdrawable circuit-breakers prevents closing, independent of circuit-breaker, and fulfils the main switch-characteristics according to EN 60 204 (VDE 0113)- line disconnecter. Unauthorized closing is also not possible after replacement of a circuit-breaker.

To activate the locking, the circuit-breaker must be switched off. If the circuit-breaker is switched on, the locking device is blocked. The blocking is only effective if the key is withdrawn. The safety key can only be withdrawn in the "OFF" position.

Locking device for crank handle

Prevents withdrawal of the crank handle. The circuit-breaker is protected against moving. The blocking is only effective if the key is withdrawn

Locking device for mechanical "OFF"

Prevents unauthorized mechanical disconnection at the front panel. The mechanical "OFF" button can only be actuated if the key is inserted (key operation). Remote disconnection is still possible. The blocking is only effective if the key is withdrawn

Locking device for charging lever

The charging lever can be locked with a padlock making it impossible to manually charge the stored energy mechanism

Locking device against resetting the trip indicator

A lockable cover prevents the manual resetting of the trip indicator after an overcurrent release. This locking device is delivered together with the option transparent cover for overcurrent release.

Sealing devices

Sealing cap over "electrical ON" button

The "electrical ON button" is fitted with a sealing cap as standard

Sealing cap over "mechanical ON" and "OFF" button

The interlocking set includes blanking caps that can be sealed

Sealing device for overcurrent release

The transparent cover can be sealed. The areas of the parameter setting are covered against unauthorized access. Openings enable access to the query and test button.

Locking Device

Closing lockout with open cubicle door

The readiness to close is mechanically deactivated if the cubicle door is open. The circuit-breaker cannot be closed either mechanically or electrically. Transmission of the locking signal by means of the Bowden wire.

Locking device against moving if the cubicle door is open for withdrawable circuit-breakers

The crank handle is blocked if the cubicle door is open and cannot be withdrawn. It is not possible to move withdrawable circuit-breakers. The blocking is only effective if the crank handle is inserted.

Interlocking of cubicle door

The cubicle door cannot be opened if the

- fixed-mounted circuit-breaker is closed (transmission of the locking signal by means of Bowden wire) or
- if the withdrawable circuit-breaker is in connected position

Access locking through the "mechanical ON" and "OFF" button

The "mechanical ON" and "OFF" buttons are protected by a cover that only permits actuation with a tool. These caps are components of the interlocking set.

Additional equipment for guide frames


Shutter

The cover strips of the shutter lock the laminated contacts of the guide frame if the withdrawable circuit-breaker is withdrawn so that they fulfil the function of a touch guard.

The cover strips can be manually opened with the strip lifter.

The cover strips can be fixed in different positions with padlocks and protected from unauthorized manipulation.

Rated current coding between circuit-breaker and guide frame

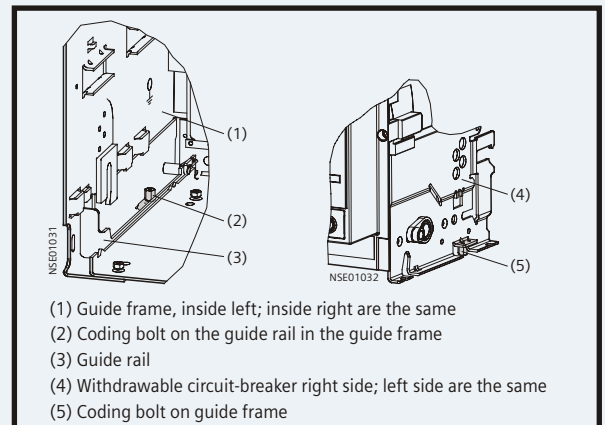

Rated current coding between circuit-breaker and guide frame

Withdrawable circuit-breakers and guide frames are equipped with a rated current coding as standard.

This ensures that in a guide frame only those circuit-breakers can be inserted whose contact strips match the laminated contacts of the guide frame (see picture above)

Option related coding

Withdrawable circuit-breakers and guide frames can be retrofitted with an option related coding

This permits the unique assignment of circuit-breakers and guide frames, taking into account different equipment. If circuit-breakers and guide frames do not have the same coding. It is not possible to insert the circuit-breaker.

There are 36 selectable coding options.

Position signal contact for guide frame

Position signal contacts can be retrofitted to the guide frame. These can be used to analyze the position of the circuit-breaker in the guide frame

Mutual mechanical circuit-breaker interlocking

The module for mutual mechanical interlocking can be implemented for two or three SENTRON WL circuit-breakers and is simple to adapt to the respective version. Fixed mounted and withdrawable circuit-breakers are compatible and can be implemented together in a single system. This is also possible with circuit-breakers 3WN6 and 3WN1

The circuit-breakers can be installed either next to one another or on top of one another, whereby the distance between the circuit-breakers is determined only by the length of the Bowden wire.

The Bowden wire are available upto a length of 6m. Lockout signal are forwarded over the Bowden wires with withdrawable circuit-breakers the interlocking is only effective in connected position. The mechanical service life of Bowden wires is 10000 operating cycles









For the mutual mechanical interlocking of circuit-breakers also see the adjacent table

Phase barriers






Plant manufacturers can make phase barriers out of insulation material as a protection against internal arcs

Guiding grooves are provided at the rear of the fixed-mounted circuit-breaker or guide frame

Position of the withdrawable circuit-breaker in the guide frame

	Representation	Position indicator	Main circuit	Auxiliary circuit	Cubicle door	Shutter
Maintenance position	 NSE01033	 NSE01037	Disconnected	Disconnected	Open	Closed
Disconnected position	 NSE01034	 NSE01038	Disconnected	Disconnected	Closed	Closed
Test position	 NSE01035	 NSE01039	Disconnected	Connected	Closed	Closed
Connected position	 NSE01036	 NSE01040	Connected	Connected	Closed	Open
(1) Auxiliary circuit (2) Main circuit (3) Cubicle door (4) Shutter						

Mutual mechanical interlocking of circuit-breaker - examples

Interlocking of two mutual circuit-breakers	Interlocking of three non- mutual circuit-breakers	Interlocking of three mutual circuit-breakers	Interlocking of three circuit-breakers, two of which are mutual
 NSE01041	 NSE01042	 NSE01043	 NSE01044
 NSE01045			

Arc chute cover

The arc chute cover is available as an optional features for the guide frame.

It serves to protect switchgear parts that are located directly next to the circuit-breaker

integrated
CubicleBUS

BREAKER TRIPPED

RESET

ETU45

MEMORY SET

Rating Plug
 $I_n = 630 \text{ A}$

KONTAKTE BEREIT SPEICHER

CONTACTS READY SPRING

AUS

EIN

OPEN

PUSH TO

CLOSE

SIEMENS

WL 1000 S

IEC 60947-2, EN 60947-2

CE

CCC

50007

Cat. B

I_n max 630 A

U_n 1000 V 50/60 Hz

I_{imp} 12 kA

U_e 690 V 1000 V

I_{cs} Inf 60 kA 50 kA

I_{cs} 0.5s 60 kA 50 kA

U_e 1000 V

I_{cs} Inf -

I_{cs} 0.5s -

690 V

Order 491211227007







**TOTALLY
INTEGRATED
POWER BY
Siemens**

**TOTALLY
INTEGRATED
AUTOMATION BY
Siemens**


Technological leaders amongst the Circuit-breakers: SEN

- 1 SENTRON VL Circuit Breaker
- 2 LCD Electronic Trip Unit
- 3 COM 10 PROFIBUS Module incl. ZSI
- 4 Breaker Data Adapter (BDA)
- 5 BDA *Plus* with Ethernet Interface
- 6 Device with web-browser (e.g Notebook)
- 7 SENTRON WL Circuit Breaker
- 8 COM 15 PROFIBUS Module
- 9 Breaker Status Sensor (BSS)
- 10 Electronic Trip Unit (ETU)
- 11 Metering Function or Metering Function Plus
- 12 ZSI (Zone-Selective Interlocking) Module
- 13 Digital Output Module as Relay or Opto-Coupler
- 14 Digital Output Module as Relay or Opto-Coupler, Configurable
- 15 Analog Output Module
- 16 Digital Input Module
- 17 Switch ES Power on PC
- 18 PLC e.g. SIMATIC S7
- 19 Power Management Software

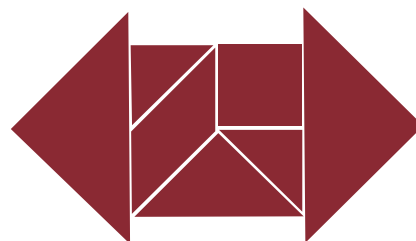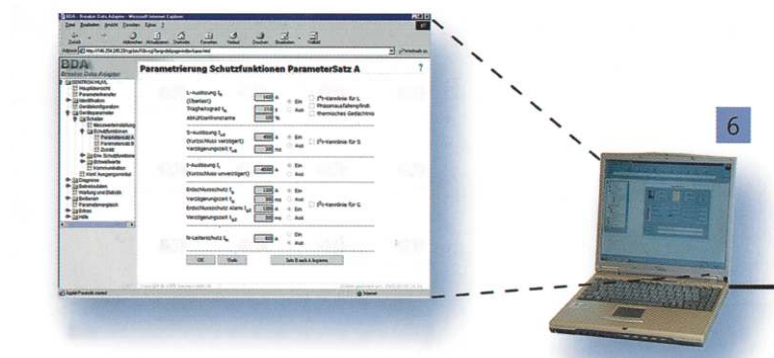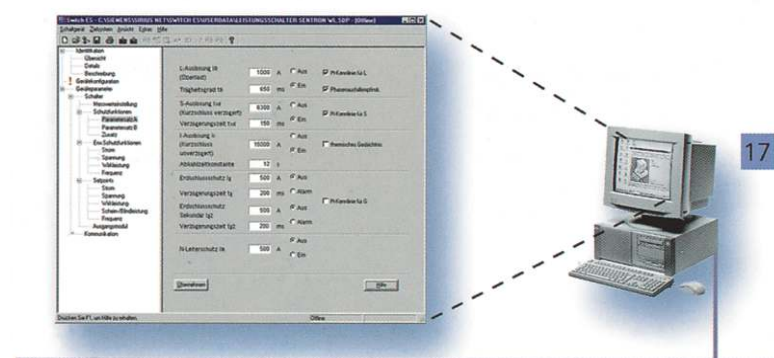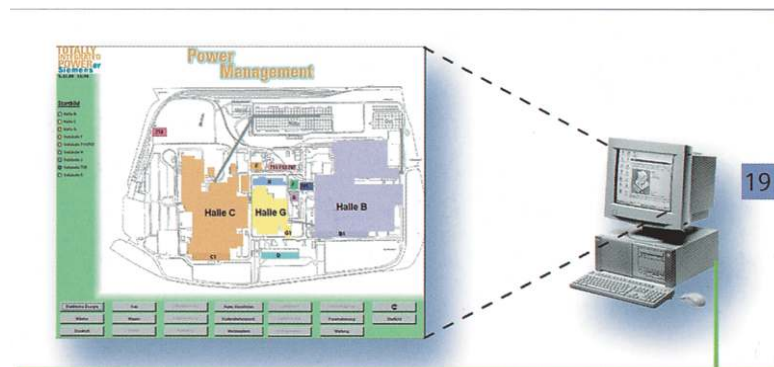

System Solutions

TRON Communication

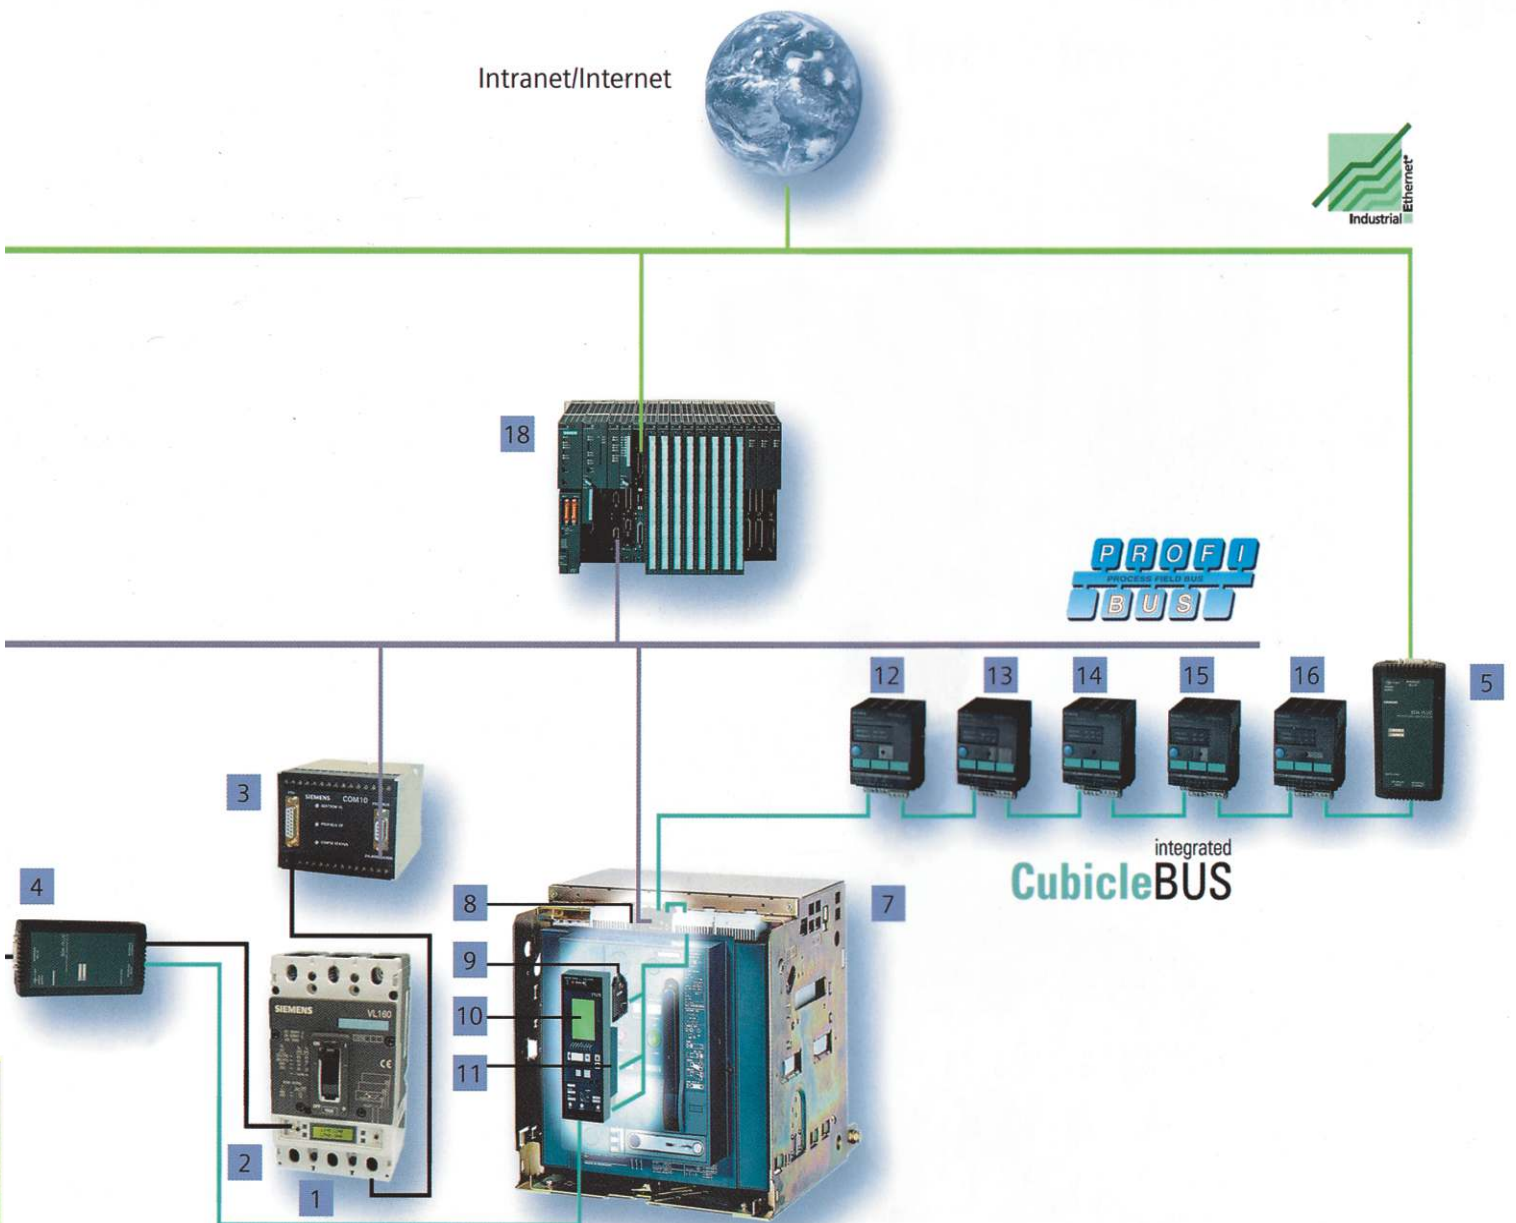

Cubicle BUS integrated:

The Cubicle BUS is the internal bus system, providing the interconnection between all the intelligent components within the SENTRON WL (e.g. trip unit, Breaker Status Sensor, metering function, communication module). It also permits the simple connection of external accessory components (CubicleBUS Module, BDA Plus) to the circuit-breaker. It is integrated as standard on all SENTRON WL circuit-breakers equipped with ETU45B and above.

External CubicleBUS Module:

By means of CubicleBUS, external accessory modules can be connected to the SENTRON WL with minimum wiring. Available modules include: digital output modules, analog output modules, digital input modules as well as ZSI modules for zone-selective interlocking. By using these accessories, one can save the need for similar discrete peripheral modules.

Digital output module with rotary switch

6 binary signals on the breaker status (causes of trip and warning) can be output over this module to external signaling devices (e.g. Light, horn) or used to switch off of other specific plant parts (e.g. Frequency converter). Digital output modules are available with or without rotary switches.

With rotary switch modules, you can choose between two signal blocks each with 6 defined assignment and an additional response delay. All digital output modules are available either as an optocoupler output (NO contact, 150 mA) or a relay output version (change-over, up to 12A). Two modules of this type may be connected to a SENTRON WL.



Digital output module configurable.

The configurable output module is available for more powerful solutions. In this case, many events on the CubicleBUS can be directly switched to one of the six available outputs, or three of the outputs can be assigned up to six

events, i.e. Up to six events can be applied to a single physical output with an "OR" logic operation. The configuration is executed either with BDA/BDA Plus or Switch ES Power. As with the output modules with rotary switch, an optocoupler and a relay variant are available.

Only one module of this type can be implemented through SENTRON WL.



Analog output module.

The analog output module can be used to output the following measured values of the circuit-breaker to analog display devices on the cubicle door

- $I_{L1}, I_{L2}, I_{L3}, I_N$ or
- $U_{L12}, U_{L23}, U_{L31}, U_{LIN}$ or

- $P_{L1}, P_{L2}, P_{L3}, S_{tot}$ or
- $\cos \phi_1, \cos \phi_2, \cos \phi_3, \Delta I_{\%}$ or
- $f_{avg}, U_{Lavg}, P_{tot}, \cos \phi_{vg}$

Four 4-20-mA/0-10V interfaces are available for this purpose. The measured values to be output are selected with a rotary switch. This analog output module means there is no need for additional transformers requiring

conventional installation/wiring in the main bus. Two modules of this type may be connected to a SENTRON WL.



Digital input module

The digital input module supports connection of 6 additional binary signals (24V DC) within the circuit-breaker environment to the system. This enables, for example, the status signaling of a switch disconnector or of a cubicle door to be transmitted to PROFIBUS-DP.

With the digital input module on the Cubicle BUS, it is also possible to automatically switch the two different protective parameter set held in the ETU 55B. And ETU- 76B releases. This allows, among other things, the automatic changing of the parameters of a tie switch in the event of a power supply failure.

One module each of this type can be implemented for the input of the six digital signals and for the automatic switchover of the parameters.



ZSI module

If Siemens circuit-breakers are arranged in several levels and minimal delays are desired, it is advisable to use the ZSI module. The circuit-breakers are interconnected by these modules. In the event of a short-circuit all circuit-breakers communicate to determine and isolate the exact short-circuit location. This way only the next

upstream circuit-breaker line energy flow direction will be opened.



COM15

By means of the PROFIBUS Module COM15 the circuit-breakers can be connected directly to the PROFIBUS-DP. The COM modules support the innovative DPV1 functions. Which guarantee the simplest commissioning and diagnosis of the circuit-breaker as well as facilitates optimal visualisation of the data.

Metering Function:

The integrated metering function can be used with all trip units, equipped with CubicleBUS interface. It is an interesting alternative to external multifunction metering devices. Measured values include currents, voltages, powers, energy, $\cos \phi$ and frequency

The data can be shown on the display of the overcurrent releases, transmitted to the PROFIBUS-DP through the COM15 and transferred to the outputs external CubicleBUS modules.

Measured parameters	Range	Accuracy
Currents I L1, IL2, IL 3, IN, Ig	30 8000 A	$\pm 1\%$ of measurement range.
Line Voltages VL12,VL23,VL31	15 130V and 130 1150 V	$\pm 1\%$ of measurement range.
Phase Volatage VL1N, VL2N, VL3N	10....75V and 75....700 V	$\pm 1\%$ of measurement range.
Present average of line voltages V avg	10....75V and 75 ...700 V	$\pm 1\%$ of measurement range.
Apparent Power SL1,SL2,SL3	13....8000 kVA	$\pm 2\%$ of measurement range.
Total apparent power	13.....24000kVA	$\pm 2\%$ of measurement range.
Active power PL1, PL2,PL3	-8000+ 8000 kW	$\pm 2\%$ of apparent power ($\cos\phi > 0.6$)
Total active power	-24000 + 24000 kW	$\pm 2\%$ of apparent power ($\cos\phi > 0.6$)
Total reactive power	-20000 + 20000 kVar	$\pm 4\%$ of apparent power
Reactive power QL1, QL2,QL3	-6400 +6400 kVar	$\pm 2\%$ of apparent power .
Power factor Cos ϕ 1, Cos ϕ 2, Cos ϕ 3	-0.6 1 +0.6	$\pm 4\%$
Power factor total	-0.6 1 +0.6	$\pm 4\%$
Long term average of currents II1, II2, II3	30 8000 A	$\pm 1\%$ of measurement range.
Long term average of 3-phase current	30 8000 A	$\pm 1\%$ of measurement range.
Long term average of active power in L1, L2, L3.	13 8000 kW	$\pm 2\%$ of apparent power ($\cos\phi > 0.6$)
Long term average of active power 3 phase.	13 8000 kW	$\pm 2\%$ of measurement range.
Long term average of apparent power in L1, L2, L3 and Total apparent power	13 8000 kVA	$\pm 2\%$ of measurement range.
Long term average of reactive power 3 phase.	- 8000 + 8000 kVar	$\pm 2\%$ of apparent power .
Energy consumed	1 10000 MWh	$\pm 2\%$
Energy delivered	1 10000 MWh	$\pm 2\%$
Reactive energy consumed	1..... 10000 MVarh	$\pm 2\%$
Reactive energy delivered	1..... 10000 Mvarh	$\pm 2\%$
Frequency	1540 Hz 40 ---- 70 Hz 70 ---- 440 Hz	± 0.1 Hz
Distortion factor of current and voltage	2 100%	$\pm 2\%$ of measurement range upto 29th harmonic
Phase unbalance of current and voltage	2 150 %	$\pm 1\%$ of displayed value.

Extended Protective functions:

The metering function is used to implement extended protective functions beyond the functionality of the overcurrent releases. If one of these parameters exceeds or falls below its default settings, the overcurrent release is tripped after the adjustable delay through the CubilceBUS.

Parameters	Range	Delay
Under voltage pickup	100 1100 V	1.... 15 s
Over voltage pickup	200 ... 1200 V	1.....15 s
Active power in normal direction	13 4000 kW	215 s
Active power in reverse direction	13 4000 kW	215 s
Overfrequency pickup	40 ... 70 Hz	1....15 s
Under frequency pickup	4070 Hz	1....15 s
Phase current unbalnce pickup	5.... 50%	1....15 s
Phase voltage unbalnce pickup	5....50 %	1....15 s
Phase rotation		
Pickup THD current	550%	515 s
Pickup THD volatge	550 %	515 s

Setpoints:

With the setpoint function it is possible to signal or record special events in the power system. The parametrs can be set for annuciation , operating other loads or for tripping purpose.

Parameters	Range	Delay
Phase overcurrent	30 10000 A	1 255 s
grond overcurrent	30 10000 A	1 255 s
neutral overcurrent	30 10000 A	1 255 s
phase current unbalance	550 %	1 255 s
current demand	3010000 A	1 255 s
under voltage	15 1200 V	1 255 s
phase voltage unbalance	5 50 %	1 255 s
over voltage	15 1200 V	1 255 s
over power in normal direction	13 10000 kW	1 255 s
kW reverse	13 10000 kW	1 255 s
kW demand	13 10000 kW	1 255 s
kVA demand	13 10000 kVA	1 255 s
kVAR demand	13 10000 kVar	1 255 s
KVAR consumed	13 10000 kVAR	1 255 s
KVA	13 10000 kVA	1 255 s
over frequency	40 70 Hz	1 255 s
under frequency	40 70 Hz	1 255 s
under power factors	0 + 0.99	1 255 s
over power factor	0 - 0.99	1 255 s
current THD	5 50 %	5 255 s
voltage THD	5 50 %	5255 s
crest factor	1....3.000	1 255 s
form factor	1....3.000	1 255 s

Metering Function PLUS:

The metering function Plus offer two additional functions as against the standard metering function:

- Two independent waveform memories.
- Harmonic analysis.


The two independent waveform memories can be used to analyze the current and voltages values at the time of the event.

If the waveform memories are programmed to “recording” (standard setting), there is continuous defined event occurs. Then, the recording is stopped, and the current or voltage waveforms at the time of the events can be observed through a visual display (graphical LCD, laptop or PC). The time window is one second; the resolution is 1649 values / seconds.

The values that can be selected for one of the waveform memories are:

Currents	IL1, IL2 , IL3, ILN , Ig
Voltages	UL1; UL2; UI3

The waveform memories can also be started or stopped individually through the communications channels (PROFIBUS-DP, Cubicle BUS).

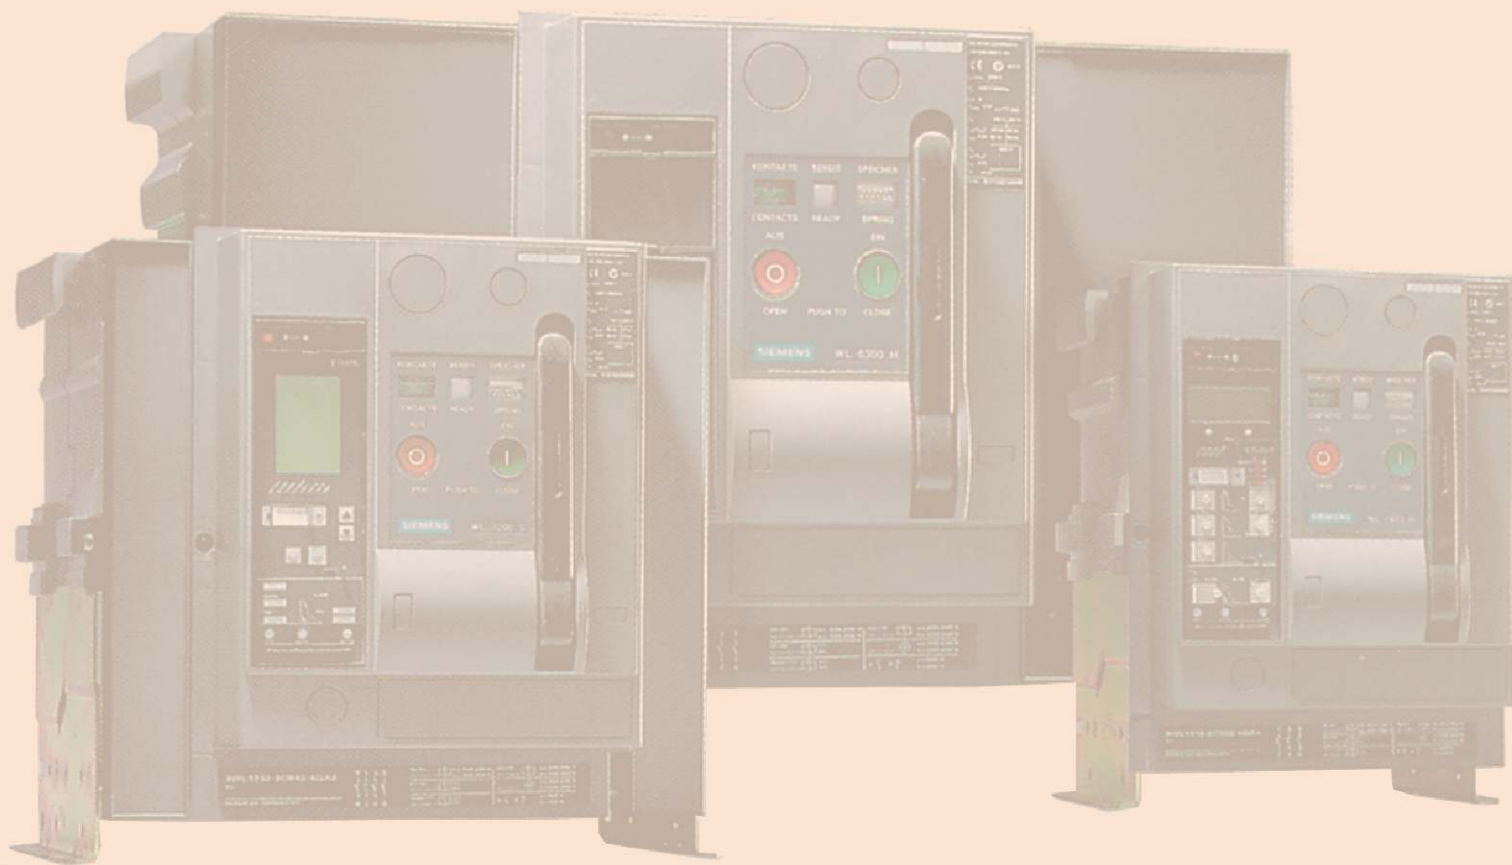

Breaker Data Adapter BDA:


The BDA is the first circuit-breaker parameterisation device with integrated web server for the local programming, operation and monitoring of the SENTRON WL and SENTRON VL. The data may be read out on any output device with browser capabilities(e.g. Notebook), without the need for special software. The only system requirement for the input / output device is a standard browser with JAVA2 virtual machine. Once the BDA is connected to the circuit breaker, the browser is filled with Web pages from BDA and the data of the circuit breaker as shown in the following pictures. In addition, the BDAPlus incorporates an Ethernet interface for direct connection to the Ethernet/Intranet/Internet.

Switch ES Power:

By means of the Switch ES Power software, the SENTRON WL and SENTRON VL circuit-breakers can be parameterised, operated and monitored via PROFIBUS-DP. Operational philosophy of switches has been harmonised with that of the BDA. An object manager ensures complete integration into the SIMATIC world. Thus, SENTRON becomes an important component in Totally Integrated Automation(TIA).


Power Management:

SENTRON circuit-breakers can be easily integrated into Power Management Systems. This facilitates efficient diagnosis, alarm, maintenance, cost centre and load management. SENTRON circuit-breakers play a key role in solutions provided by Totally Integrated Power(TIP).

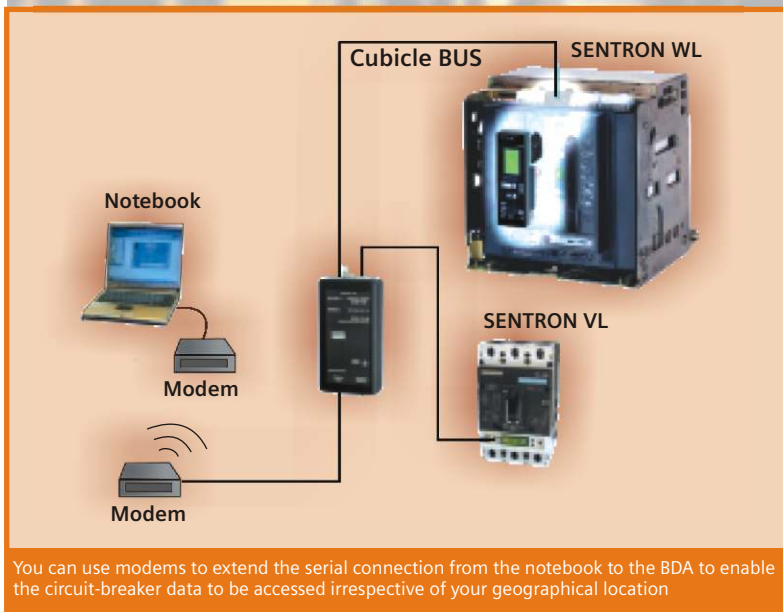

You can use modems to extend the serial connection from the notebook to the BDA to enable the circuit-breaker data to be accessed irrespective of your geographical location

Breaker Data Adapter - diagnostics

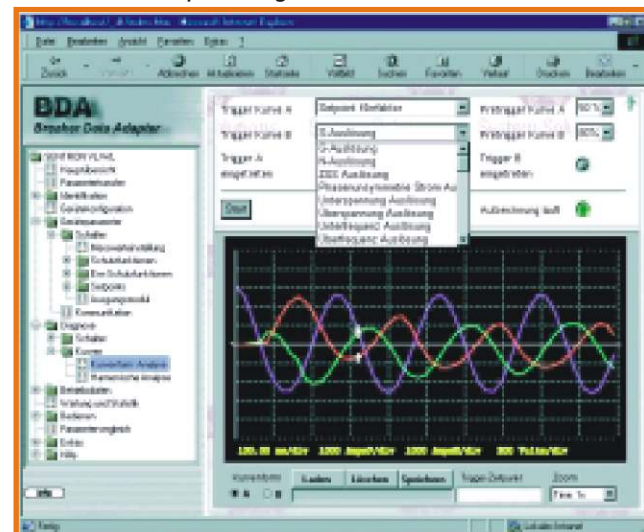

Data that can be transmitted using PROFIBUS-DP or the breaker data adapter



Transmittable circuit-breaker data

	BSS	BDA	BSS	COM15
Order code (Order no. Of circuit-breaker + "-Z") Order no.	F01 +BDA/BDA Plus order no.		F02	
<i>Application options</i>				
Transmission of circuit-breaker data to PROFIBUS-DP and Integration in higher-level visualization system possible e.g. In PCS7 Power Management Systems, WinCC (Incl. Add Ons, such as SMS radio server)	—		✓	
Transmission of circuit-breaker data and software (i.e. HTML pages Incl. Data) to local output device or remotely controlled via the Ethernet/Intranet/Internet (no Integration option in higher-level visualization systems) e.g. for monitoring diagnostics, maintenance and configuration of individual circuit-breaker	✓		—	
Use of the functionality of all CubicleBUS modules E.g. Programming of the configurable digital output modules, status interrogation of digital input modules diagnostics, testing	✓		✓	
<i>Transmittable circuit-breaker data without integrated metering function</i>				
Device Identification: Communication address, circuit-breaker order no., Circuit-breaker characteristic data (Size no. Of poles, rated current module etc.) ID numbers, release type, free text for equipment identifier and comments	✓ ✓ ¹⁾		✓ ✓	
Operating states: Closed / open signal spring store mechanism, tripped, readiness to close, Circuit-breaker position (connected, test, disconnected and absent) for withdrawable circuit-breakers, PROFIBUS write protection on/off, free user input	✓ ✓ ¹⁾ ✓ ¹⁾		✓ ✓ ✓	
Control commands Closed / open circuit-breakers, enable/disable free user output Reset trip signal Clear event and trip log Reset the min/max measured values, reset maintenance information	✓ ¹⁾ ✓ ✓ ¹⁾ ✓		✓ ✓ ✓ ✓	
History Readout of event log, readout of trip log	✓ ¹⁾		✓	
Maintenance Information Number of L, S, I releases and total, contact erosion Number of switch operations under load and total operating hours	✓ ✓ ¹⁾		✓ ✓	
Event signaling Trip signal with identification of the current causing the trip Alarm signaling (e.g. Overload) with incoming/outgoing information All named event signaling with time stamp	✓ ✓ —		✓ ✓ ✓	
Configuration of protective functions Readout of protective function parameters Change the settings of the protective function parameters through communication Parameter set changeover option (set A to set B)	✓ ✓ ²⁾ ✓ ²⁾		✓ ✓ ²⁾ ✓ ²⁾	
Measured values Phase currents, each with min/max, value Temperature in the circuit-breaker with min/max. value Temperature in the cubicle with min/max, value All named measured values with time stamp	✓ ✓ =		✓ ✓ ✓ ✓	
<p>* 1) Only possible in connections with the COM15 Module (PROFIBUS connection not required)</p> <p>* 2) Only possible with ETU 55B and ETU 76B</p> <p><i>Additional transmittable circuit-breaker data with integrated metering functions as mentioned on page 24, 25 & 26</i></p>	 Metering function		 Metering function Plus	

Advantages through Siemens 3WL Communication:

Startup and Configuration:

- PROFIBUS-DP enables faster and more reliable connections as conventional point-to-point wiring.
- Minimum plant down times for necessary expansion.
- Simple startup test.
- Transparent startup process with good documentation options.
- Fast and reliable local configuration via PROFIBUS-DP or the Ethernet / Intranet / Internet with intelligent configuration software.

Operator control and monitoring:


- Increase transparency in power distribution through transmission of current status information, alarm signals and set point exceeding.
- Fault management enables a fast response when leaving the normal state. Important message (e.g. trip signal and reasons) can be transmitted by SMS to the cell phone of the plant personnel.
- Options for the central readout of parameters and their automatic transmission to interchangeable circuit-breakers minimizes fault liability and shortens down times.
- Effective diagnostics management e.g. through determinations of the precise cause of fault and recording of the phase current.
- Remote control of the circuit-breaker enables both the manual and automatic switching on and off of plant parts.

Power Management:

- The balancing of load peaks and trough allows the realization of energy imports costs. Efficient load management enables the demand-orientated switching.
- Analysis of the archived power values (output curves) enables creation of a power consumption profile. This can be the basis for future power procurement.
- The quality of energy (harmonics, flickers) can be logged and documented. This enables effective power quality management.
- Cost center management makes power consumption more transparent for commercial analysis. Cost can be clearly assigned and optimized.

Maintenance and service:

- Information for preventive maintenance (e.g. number of switching operations, operating hours, contact erosion estimation) enables timely and calculated planning of necessary maintenance work. This reduces the risk of costly damage to sensitive plant parts.
- The central control of maintenance work and the ability to SMS key information considerably reduce costs for maintenance and service.

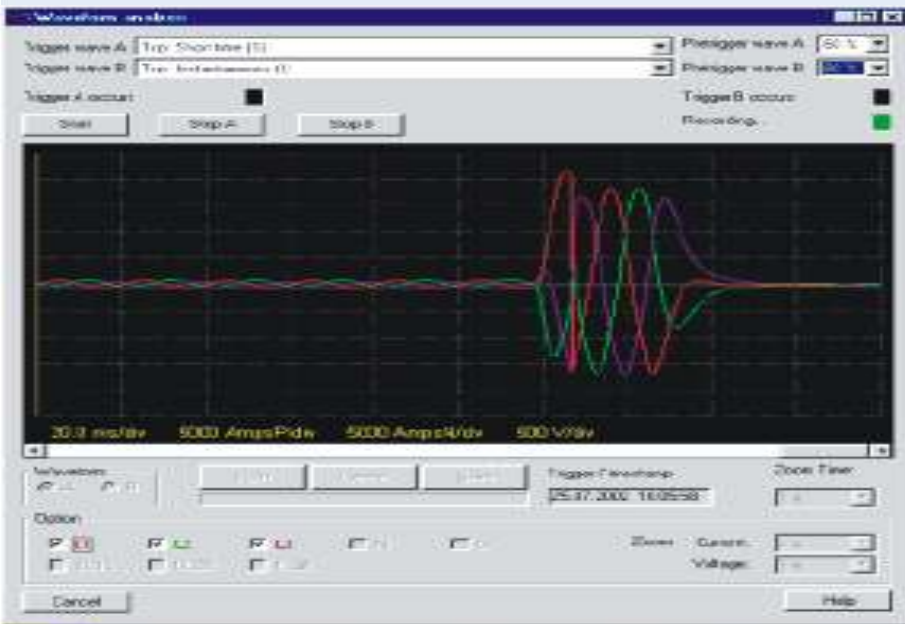

The Intelligent Simplicity



31

Siemens Ltd.

Sales Offices:

- **Ahmedabad** - 380009
1st Floor, Shanti Chamber
Terapanth Marg, Opp. Dinesh Hall
Near I.T. Cross Road, Navrangpura
☎ +91 79 7546803, 7546494
Fax +91 79 7546711
- **Bangalore** - 560100
No. 84, Keonics Electronics City, Hosur Road
☎ +91 80 8521122-29
Fax +91 80 8521180
- **Chennai** - 600034
4, Mahatma Gandhi Road
☎ +91 44 28334432/33/36
Fax +91 44 28334428
- **Coimbatore** - 641018
No 12 Second Floor
Addis Street, Grey Town
☎ +91 422 2380908, 2380772
Fax +91 422 2380271
- **Kolkata** - 700042
43 Shanti Palli, Eastern Metropolitan Bypass
☎ +91 33 24421134, 24421135
Fax +91 33 24421137
- **Mumbai** - 400018
130 Pandurang Budhkar Marg, Worli
☎ +91 22 24987000-02
Fax +91 22 24987312
- **New Delhi** - 110002
4A, Ring Road, I.P. Estate
☎ +91 11 23738589, 23738594
Fax +91 11 23314178
- **Pune** - 411004
Vasant Vihar, 1205/2/6 Shirole Road
Shivajinagar
☎ +91 20 5539577/9760
Fax +91 20 5539758
- **Secunderabad** - 500025
9-1-87/119/2 1st Floor, St. John's Road
☎ +91 40 27702552, 27704544
Fax +91 40 27702951

Resident Sales Engineers

- **Aurangabad** - 431005
17, 'Maee', Limayewadi, Mitranagar
☎ /Fax +91 0240-2320117
Mobile: 9822171649
E-mail: rshintre_agd@sancharnet.in
- **Bhilai** - 490026
MIGC 2339 Indl. Estate
M.P. Housing Board, M. P.
☎ +91 0788-2381305
Mobile: 9425238305
E-mail: crishna_hare@yahoo.com
- **Bhopal** - 462016
302, Phase II, The Garden Residence
Chuna Bhatti
☎ +91 0755-2295485, 2469458
Mobile: 9826022293
E-mail: sameer2007@sify.com
- **Bhubaneswar** - 751 016
L-1/32 Gangotri, VIP Enclave
Chandrasekharpur
☎ +91 0674-2442692
Mobile : 94370 42692
E-mail: sudhir_slb@satyam.net.in
- **Chandigarh** - 134104
902, Sector 16, Panchkula, Haryana
☎ /Fax +91 0172-585902
E-mail: siemenschd@satyam.net.in
- **Cochin** - 682016
Preethi Building, 1st Floor
M.G.Road, Ernakulam
☎ +91 0484-2380201, 2380506
Fax +91 0484-2371564
E-mail: kumchn@satyammall.com
- **Durgapur** - 713 216
A-39, Moulana Azad Sarani
1st Floor, City Centre
dgp_sldgp@sancharnet.in
☎ +91 0343-2546777
Mobile: 98321 72046
- **Gurgaon** - 122001
House No.513, Sector 5
☎ +91 0124-2253410
E-mail: anurag.batra@siemens.com
- **Guwahati** - 781003
G1, Hill View Apartment, Nabagraha Path
Chenikuthi Hill Side, Assam
☎ +91 0361-2663988
Mobile: 98640 37562
E-mail: konard@vsnl.com,
konard@rediffmail.com
- **Hardwar** - 249403
H-5, Shivalik Nagar, Phase II
B.H.E.L, Ranipur, U. P.
☎ /Fax +91 01334-230767
E-mail: rpandit@datainfosys.net
- **Indore** - 452001
78, Anand Nagar, Chitawad Road
☎ /Fax +91 0731-2400735
Mobile: 9826022295
E-mail: siemens@bom4.vsnl.net.in
- **Jaipur** - 302016
301, 3rd Floor, Kamal Apartments
Bhaskar Marg, Bani Park
☎ +91 0141-2204910
E-mail: siemens_jpr@dil.in
- **Kanpur** - 208002
Flat No.19-B, 4th Floor, Prabhu Vatika
7/109, Swarup Nagar, U. P.
☎ /Fax +91 0512-2548765
E-mail: siemens_knp@satyam.net.in
- **Kolhapur** - 416001
Plot No.35, Vasant Smruti, Shivaji Park
☎ +91 0231-2536626
E-mail: zakirhusain.bairagdar@siemens.com
- **Lucknow** - 226001
House No.47, HIG Flats
1st Floor, Avas Vikas Colony, U.P.
☎ +91 0522-2217421
E-mail: siemens_lko@satyam.net.in
- **Ludhiana** - 141001
67, Defence Colony, (Shamsher Nagar)
BRS Nagar, Punjab
☎ /Fax +91 0161-2457199
E-mail: siemens_ldh@siemens.net.in
- **Madurai** - 625003
E-212, Santhanam Road, T.V.S. Nagar
☎ +91 0452-2693705
Mobile: 9843269370
E-mail: srinivasan.veeraraghavan@siemens.com
- **Nagpur** - 441 012
201, Pramila Aparment
P.R.Sathe Marg, Dhantoli
☎ +91 0712-5615221
Mobile: 9823283280
E-mail: siemensnagpur@sify.com
- **Nashik** - 422002
Flat No.3, Bldg. No.63, Santoshi Building
Ushakiran Society, Triambak Road
☎ /Fax +91 0253-2311029
Mobile: 9822193204
E-mail: patel.rajesh@siemens.com
- **Ranchi** - 834002
Flat No. A-201, Shiv Niwas
Old Rubber Factory Compound
Shukla Colony, Hinoo Main Road
☎ +91 0651-2250054
Mobile: 9431115492
E-mail: ganguly@vitalmail.com
- **Renukoot** - 231217
C/o. Mr.Abhay Bhargava, Patel Nagar
Near Shweta Hotel, Murdhwa
Dist. Sonebhadra, U.P.
☎ /Fax +91 05446-253904
E-mail: piyush@scl.net.in
- **Rourkela** - 769 004
T-15 Civil Town
☎ +91 0661-2401724
Mobile: 94370 47147
E-mail: angshumanrc@yahoo.com
- **Surat**
F31/204, Akshar Township
Behind Intercity Township
Punakhumbaria Road
☎ +91 0261-2367798
Mobile: 9825506964
- **Udaipur** - 313001
Mayura Apartments, Flat No.T-2
Plot No.218-A, Sardarpura, Rajasthan
☎ /Fax +91 0294-2560802
E-mail: siemens@datainfosys.net
- **Vadodara** - 390021
D-903, Kalpavruv, Opp. GEB Substation
Gotri Road
☎ +91 0265-2352234
Mobile: 9825506963
E-mail: anshu.buch@siemens.com
- **Vapi** - 396195
C-102, Ameer Apartments
GIDC Residential Area
☎ +91 0260-2435089
Mobile: 9825147957
E-mail: ashutosh.shukla@siemens.com
- **Vijayawada** - 520010
G-2, Shreya Towers, Moghalrajapuram
Near Jammichettu Centre
☎ +91 0866-5529966
E-mail: pramod.krishna@siemens.com
- **Visakhapatnam** - 530003
1st Floor, 7-8-17, Harbour Park Road
Mobile: 9848013931
E-mail: sunandan.dowerah@siemens.com

Siemens Ltd

Automation and Drives Division LV Control & Distribution Products

Thane Belapur Road
Thane 400601
Fax : + 91 22 2760 0076
E-mail : AD.CDPM @kwa2.siemens.co.in