




Geared up for any situation

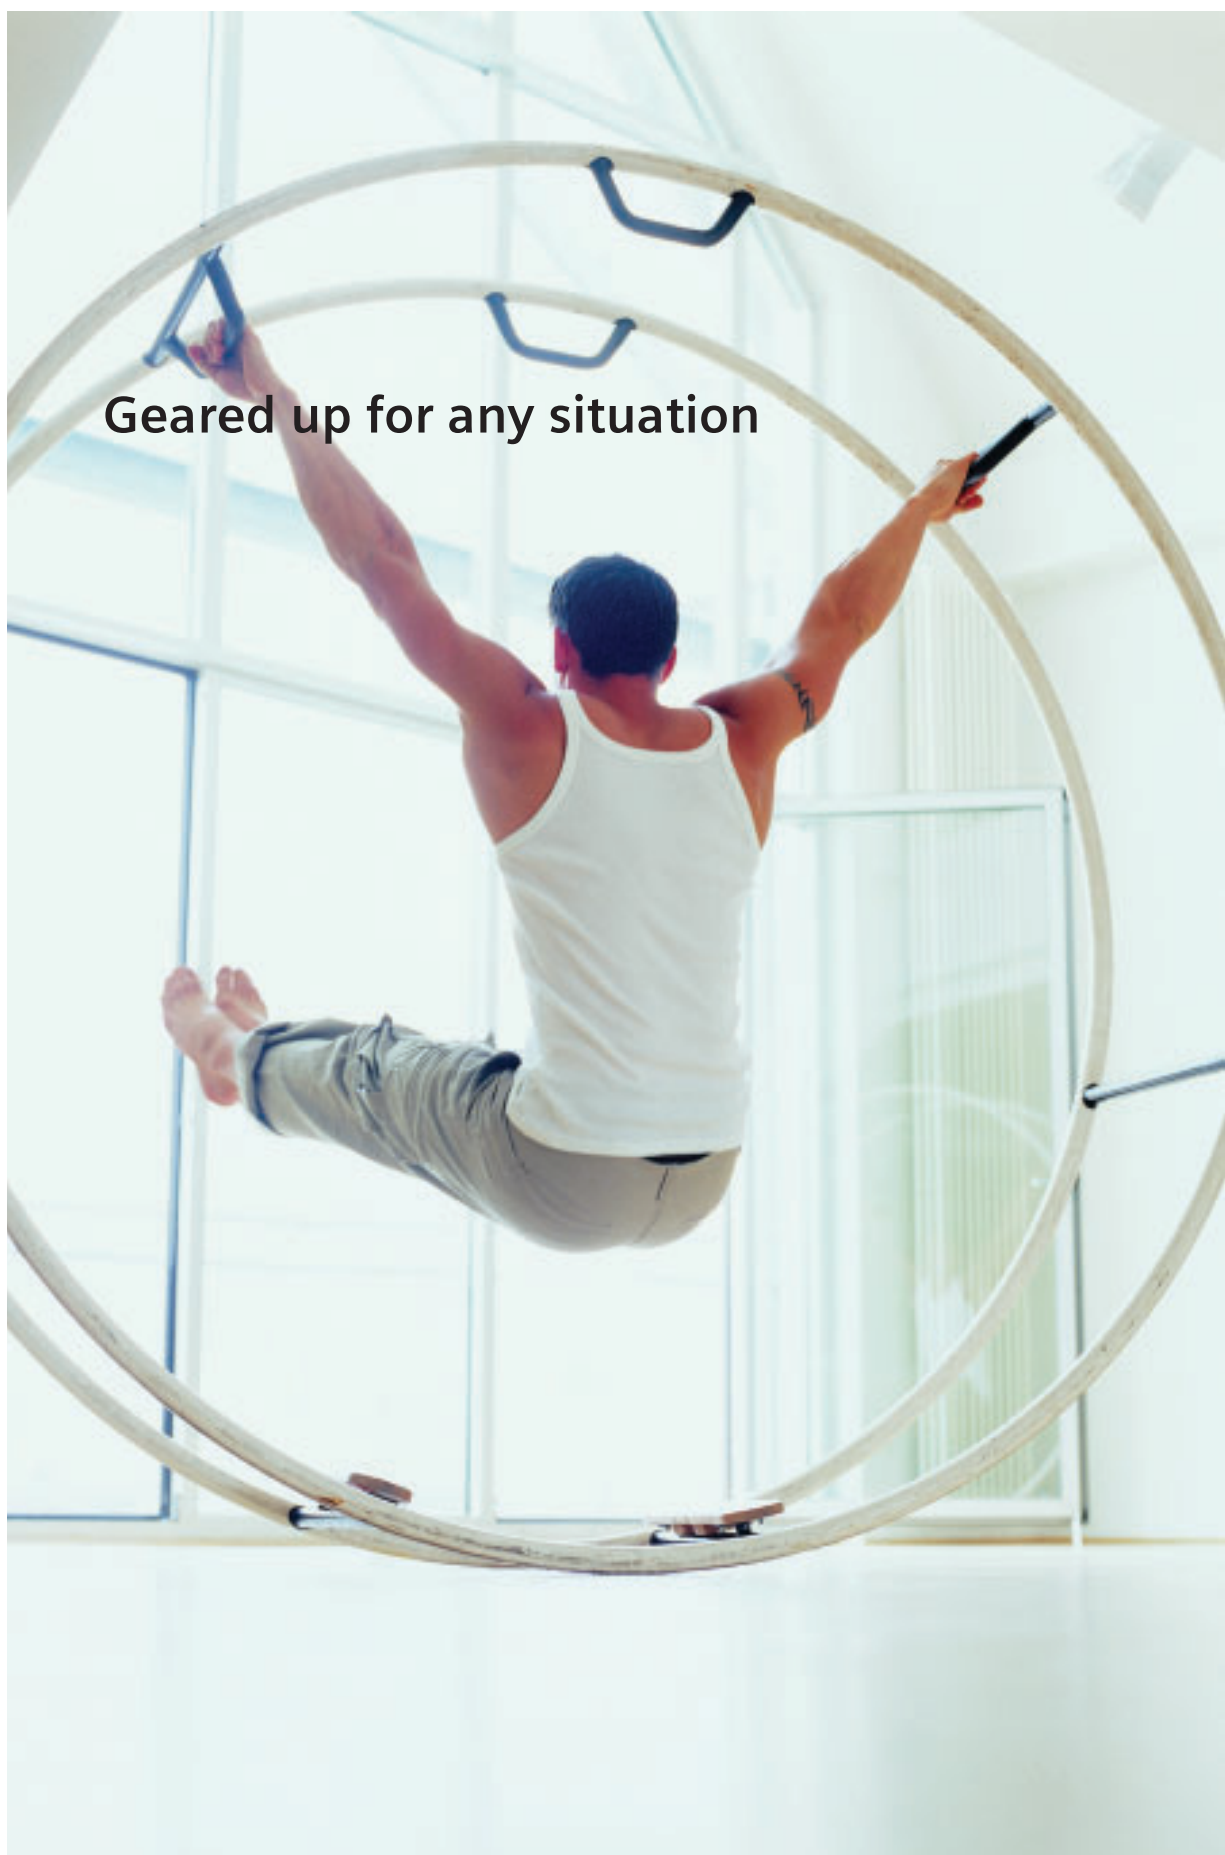

Fuses HRC

Answers for industry.

SIEMENS

Introduction

Short data description : 3NA7 LV HRC Fuses

Standards	IS 13703 Part 2 Section 1(1993); IEC 269
Dimensions	IS 13703; IEC 269
Operating class	gG
Rated Voltage	AC 500V / DC 440V upto 630A (DC 250V for size 00)
	AC 690V/DC 440V (DC 250V for size 00)
Rated Current Range	2 to 800A: (500 Vac) 800A@415V.
	40 to 500 A (690 Vac)
Rated Breaking Capacity	AC 120kA / DC 25kA
Mounting position	as desired but preferably vertical
Resistance to climate	-30° C to +50° C at 95% relative humidity

LV HRC Fuses

During installations, when the conventional HRC Fuses are mounted on the fuse bases or Switch Disconnecter Fuse Units in panels as in Fuse Rails above certain height, it is very difficult to identify the status of the fuse link whether healthy or blown. This necessitates requirement of additional front indication.

The combination indicator Fuse has two indicators as against one indicator in conventional fuses. One indicator is on top cover plate similar to conventional fuses and other indicator is at the centre of the ceramic body of the fuse link. This helps in clear identification of status of fuse even from front side.

3NA7 LV HRC Fuses are available in 5 different sizes from 2 to 800A. The main part of the LV HRC fuses is the fuse element of high-grade copper. The important factors are the resistance value per meter, the

material thickness and the dimensional accuracy. Three criteria decisive in the production of the fuse elements are:

- Accurate cutting and punching
- Precise application of the solder deposit
- Accurate and concentric insertion of the fuse-element in the fuse body.


Where several fuse elements are involved, these are fitted exactly parallel to each other in the fuse body. This ensures adequate cooling of the individual arcs. The precision of the parallel arrangement can be verified by observing the beads of molten metal after the fuse has switched off a short circuit. The fuse-element must not be too close to the wall of the fuse body as otherwise there is no protective layer of sand. If the arc were to touch the wall of the fuse body, the fuse might burst or blow.

The fuse elements of 3 NA7 fuses are of operating class gG and of copper. The use of silver-plated or pure silver fuse-elements is not required for physical reasons.

Oxidation, also called scalling of copper, which reduces the cross-section of the fuse-element, occurs only at a temperature of approx. 350° C. In the time/current range within which a fuse operates, however, only temperatures of 180° C to 240° C are attained. Hence safe tripping is ensured with this fuse element.

Advantages

- Consistently high quality LVHRC fuses
- Least stresses to downstream equipments during short circuit due to lower let through current
- Low power losses resulting in high economy and minimal heating.
- Safe and reliable breaking capacity from the smallest and dangerous overload current upto the largest short-circuit current.
- Finely graded selectivity level for the optimum use of cable cross sections
- High resistance to ageing thus avoids unnecessary operational faults
- Constant characteristics even under different temperature conditions

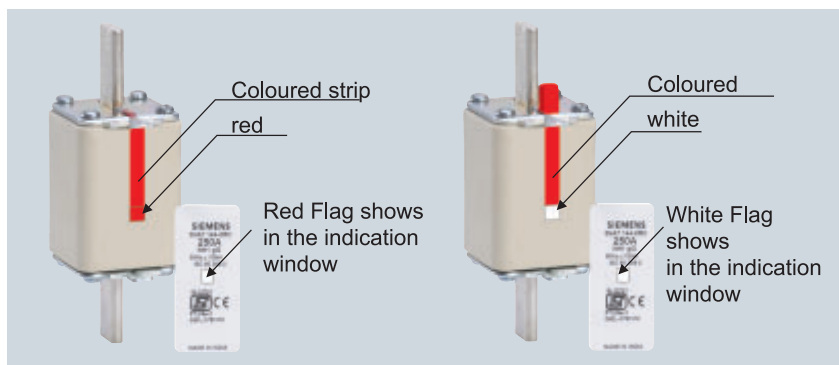

Applications

Fuses are primarily used for the protection of cables and conductors against overload and short-circuit currents, and are also suitable for the protection of equipment and systems. Some of the important applications are:

- Due to high selectivity 3NA7 HRC fuses are used in radial and ring networks
- For back-up protection of MCBs
- For protection of motor circuits in which operational short-term overloads and short-circuits occur
- Short circuit protection for switching devices such as contactors and circuit-breakers

The field of application for fuses include industrial installations, power supply utilities, equipment manufacturers, switchboards and control panels.

Selectivity

In an installation, as a rule, several fuses are connected in series. Selectivity ensures that in an emergency, only the plant in the faulty circuit is disconnected, and not the entire operation. Siemens fuses with operating class gG for a rated voltage up to ~230V are mutually selective in the ratio 1:1.25, i.e. from rated current type to rated current type. This is due to the much lower tolerance range, $\pm 5\%$ of the time/current characteristics curve. The standard requires a ratio limit of 1:1.6, which our fuses clearly exceed. The cable sizes due to the smaller rated currents can also be reduced.

Breaking capacity

The fuses distinguish themselves with their high rated breaking capacity of at least 120kA which is achieved through:

- Fuse element design and manufacturing process
- Precise positioning of fuse element inside the fuse body
- Chemical purity, grain size and density of the quartz sand
- Resistance to pressure and temperature change on the ceramic fuse body

The basic requirements and circuit data for the testing, i.e. voltage,

load factor, switching angle etc. are detailed in the international (IEC 269) standards and Indian standard IS 13703.

Current limitation

Along with a reliable rated breaking capacity the current limiting effect i.e. let through current of fuse links can have a significant influence on the economy of an installation.

During the interruption of a short-circuit by a fuse, the short-circuit current also flows through the upstream fuses. The short-circuit current is limited by the network impedance.

By the simultaneous melting of all narrow parts of the fuse element partial electrical arcs lying in series assure quick breaking with greater current limitation. The current limitation is therefore, influenced substantially by the quality of manufacturer, for which Siemens fuses is known for.

This strong current limiting property of 3NA7 protects the system for excessive loads everytime.

Co-ordination for cable and line protection

To ensure co-ordination of fuses with regard to cable and line protection during overload, according to DIN 0100 part 430, the following conditions apply:

- (1) $I_B \leq I_N \leq I_z$ (Nominal current range)
 - (2) $I_2 \leq 1.45 \times I_N$ (Tripping range)
- I_B : Operating current of the circuit
 I_N : Nominal current of selected protective device
 I_z : Permissible current loading capacity at given operating conditions for the cable or line
 I_2 : Tripping current of the protective device under determined conditions (large test current)

The factor 1.45 is an internationally accepted compromise between utilisation and level of protection for a conductor, when considering the disconnection limits and the possible protective device (e.g. fuses).

Co-ordination for cable and line protection

Siemens fuse links of the operating

class gG completely conform with the supplementary part of the standard IEC 269, the condition being:

"Disconnection with $I_2 = 1.45 \times I_N$ for the conventional continuous test under the particular test requirements according to the named supplementary part of standard IEC 269".

A direct co-ordination is therefore possible.

Rated watt loss


The economy of a fuse depends considerably on the rated watt loss. This should be kept as low as possible by minimal self-heating capability. In order to achieve a low watt loss, the fuse element should be as thick as possible, however to ensure a high rated breaking capacity, a thin fuse element that ensures safe arc quenching is required. Siemens fuses when considering their high breaking capacity, have their rated power losses kept as low as possible.

These values lie far below the limits specified in the standards. That means minimal heating, reliable breaking capacity and high economy.

Load carrying capacity at higher ambient temperatures

Test rig according to IEC 269

According to IEC 269, the shape of the time / current characteristic of LV HRC fuse links is referred to an ambient temperature of $20^\circ\text{C} \pm 5\%$. When being used at a higher ambient temperature (see diagram), a lower load carrying capacity should be anticipated. For example, at an ambient temperature of 50°C , a LV HRC fuse link should be loaded with only 90% of the rated current. The short-circuit behaviour is not affected by a high ambient temperature.

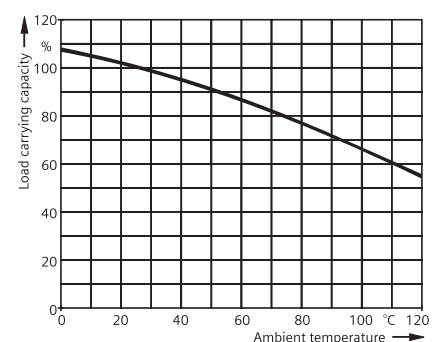







Selection & Ordering Data

LV HRC fuses : 500V AC

LV HRC fuse links

- According to IEC 60269/IS 13703
- Rated voltage: 500 V AC / 415 VAC for 800 A
- Rated voltage (DC): 440 V DC, upto 630A (250 V for size 000/00)
- Utilization Category gG
- Rated breaking capacity : 120 kA (AC), 25 kA (DC)

	Size	Rating A	Order No.	Std. Pkg. (Nos.)	Weight per unit kg	Replaces 3NA3 Type
 	000	2	3NA7 802-0RC	5/10	0.125	3NA3 802-7Y
		4	3NA7 804-0RC			3NA3 804-7Y
		6	3NA7 801-0RC			3NA3 801-7Y
		10	3NA7 803-0RC			3NA3 803-7Y
	000	16	3NA7 805-0RC	5/10	0.125	3NA3 805-7Y
		20	3NA7 807-0RC			3NA3 807-7Y
		25	3NA7 810-0RC			3NA3 810-7Y
		32	3NA7 812-0RC			3NA3 812-7Y
	000	40	3NA7 817-0RC	5/10	0.125	3NA3 817-7Y
		50	3NA7 820-0RC			3NA3 820-7Y
	000	63	3NA7 822-0RC	5/10	0.125	3NA3 822-7Y
		80	3NA7 824-0RC			3NA3 824-7Y
	1	100	3NA7 830-0RC	5/10	0.190	3NA3 830-7Y
		125	3NA7 832-0RC			3NA3 832-7Y
		160	3NA7 836-0RC			3NA3 836-7Y
	1	200	3NA7 120-0RC	1/10	0.270	3NA3 120-7Y
		224	3NA7 122-0RC			3NA3 122-7Y
		250	3NA7 124-0RC			3NA3 124-7Y
	2	80	3NA7 124-0RC	1/10	0.450	3NA3 124-7Y
		100	3NA7 130-0RC			3NA3 130-7Y
	2	125	3NA7 132-0RC	1/10	0.475	3NA3 132-7Y
		160	3NA7 136-0RC			3NA3 136-7Y
	1	200	3NA7 140-0RC	1/10	0.450	3NA3 140-7Y
		224	3NA7 142-0RC			3NA3 142-7Y
	1	250	3NA7 144-0RC	1/10	0.475	3NA3 144-7Y
		200	3NA7 240-0RC			—
	2	250	3NA7 244-0RC	1/10	0.475	—
		315	3NA7 252-0RC			3NA3 252-7Y
	2	400	3NA7 260-0RC	1/10	0.670	3NA3 260-7Y
		315	3NA7 352-0RC	1/5	1.040	3NA3 352-7Y
	3	400	3NA3 360-0RC			3NA3 360-7Y
		500	3NA3 365-0RC			3NA3 365-7Y
		630	3NA3 372-0RC			3NA3 372-7Y
		*800	3NA3 375-4RC			—



* 800A fuses - Rated Voltage at 415V AC.

Selection & Ordering Data

LV HRC fuses : 690V AC

LV HRC fuse links

- According to IEC 60269/IS 13703
- Rated voltage: 690 V AC
- Rated voltage (DC): 440 V DC, (250 V for size 00)
- Utilization Catagory gG
- Rated short circuit breaking capacity : 120 kA (AC), 25 kA (DC)

	Size	Rating A	Order No.	Std. Pkg. (Nos.)	Weight per unit kg
	00	40	3NA7 817-6RC	5/10	0.190
		50	3NA7 820-6RC		
		63	3NA7 822-6RC		
		80	3NA7 824-6RC		
		100	3NA7 830-6RC		
	1	125	3NA7 132-6RC	1/10	0.270
		160	3NA7 136-6RC		0.270
		200	3NA7 140-6RC		0.450
	2	250	3NA7 244-6RC	1/10	0.670
		315	3NA7 252-6RC		
	3	400	3NA3 360-6RC	1/5	1.040
		425	3NA3 362-6RC		
		500	3NA3 365-6RC		



Selection & Ordering Data

LV HRC Fuse Bases

Fuse bases are available in four different ratings corresponding to different sizes of fuse links. They consist of an insulated base on which lyra contacts are fixed. Fuse links can be removed under live conditions. The fuse bases can be supplied either with screw terminals or plug in terminal connection.

The fuse bases are manufactured in accordance with IEC 269 & IS 13703

Rated voltage : AC 690 V/DC 440V

Special Characteristics :

- Low contact resistance due to silver plated lyra contacts
- Easy handling due to special shape of lyra contacts
- Constant contact pressure ensures reliable current conduction


		Conductor - cross section upto mm ²	Order No.	Std. Pkg. (Nos.)	Weight per unit kg
	<ul style="list-style-type: none"> • Size 00 Rated current 160 A (Suitable for fuselink of size 000/00) Single pole 				
	With screw in connection	95	3NH3 030	1/10	0.145
	With plug-in connection	6 to 70	3NH3 032	1/10	0.145
	<ul style="list-style-type: none"> • Size 1 Rated current 250 A 				
	Single pole With screw in connection	150	3NH3 230	1/5	0.390
	<ul style="list-style-type: none"> • Size 2 Rated current 400 A 				
	Single pole With screw in connection	300	3NH3 330	1/5	0.420
	<ul style="list-style-type: none"> • Size 3 Rated current 630 A 				
	Single pole With screw in connection	2x40x5	3NH3 430	1/5	0.680
	<ul style="list-style-type: none"> • Size 3 Rated current 800 A 				
	Single pole With screw in connection	2x40x5	3NH3 430-4RC	1/5	0.720

Selection & Ordering Data

Isolating Links


Together with fuse bases, these isolating links can effectively be used to serve as removable links in feeders instead of isolators.

These are made of silver plated copper alloy in one piece and are similar in construction to the ribbed contact knife of the fuse link.

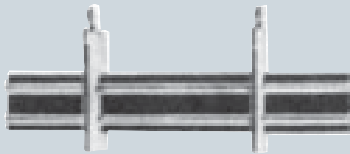	Rating	Order No. (Nos.)	Std. Pkg. per unit (Kg)	Weight
	160	3NG1 000	1	0.075
	250	3NG1 250	1	0.175
	400	3NG1 300	1	0.260
	630	3NG1 400	1	0.280

Fuse Pullers

Fuse puller with special insulated handle makes it possible to change fuses even under live conditions (on load). A mechanical lock provided on the fuse puller prevents the fuse link from dropping out the puller. The fuse link can be released by merely pressing the push button provided on a fuse puller.

		Order No. Unit	Std. Pkg. (Nos.)	Weight per unit (Kg)
	Fuse Puller	3NX1 010	1	0.205
		3NX 1 011	1	0.560
	Fuse Puller Type 3NX1 010, 3NX1 011 suitable for all sizes of fuse links and isolating links.			
3NX1 011				

Characteristic Curves

LV HRC Fuse Links

Time-current characteristic chart


Range
3NA7 8

Size
000/00

Operating class
gG


Rated voltage
AC 500 V / DC 250 V

Rated current
2 - 160 A

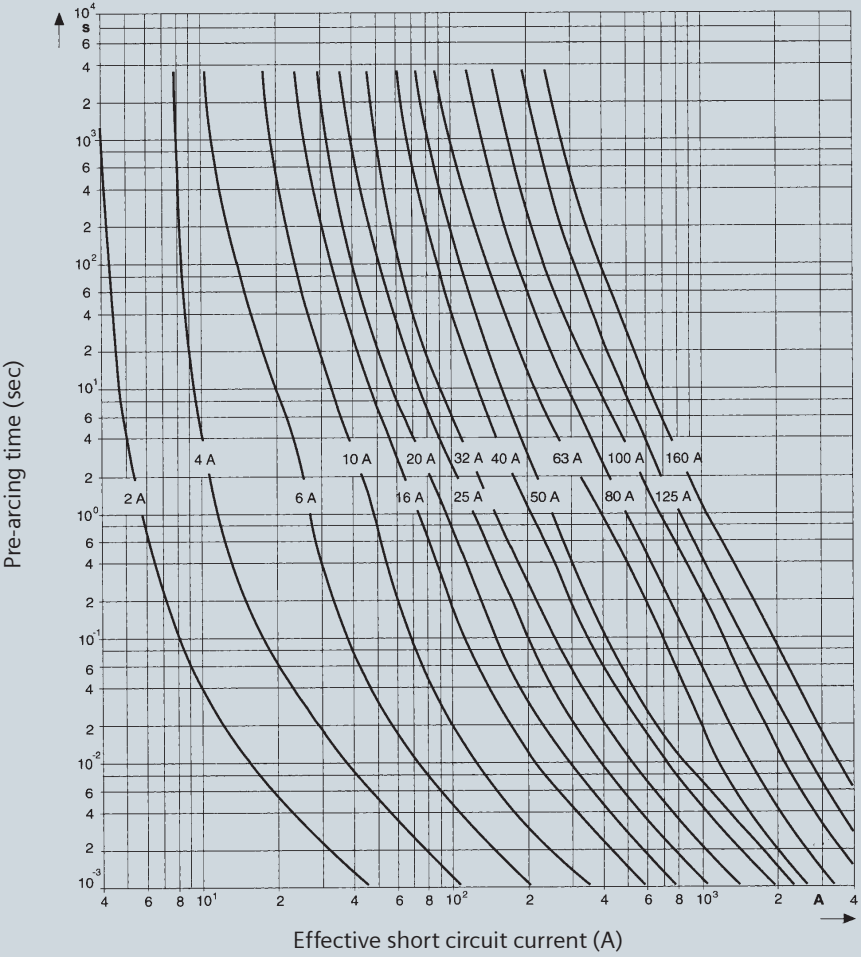

Peak let-through current chart

- ① Peak short circuit current with maximum DC component
- ② Peak short circuit current without DC component

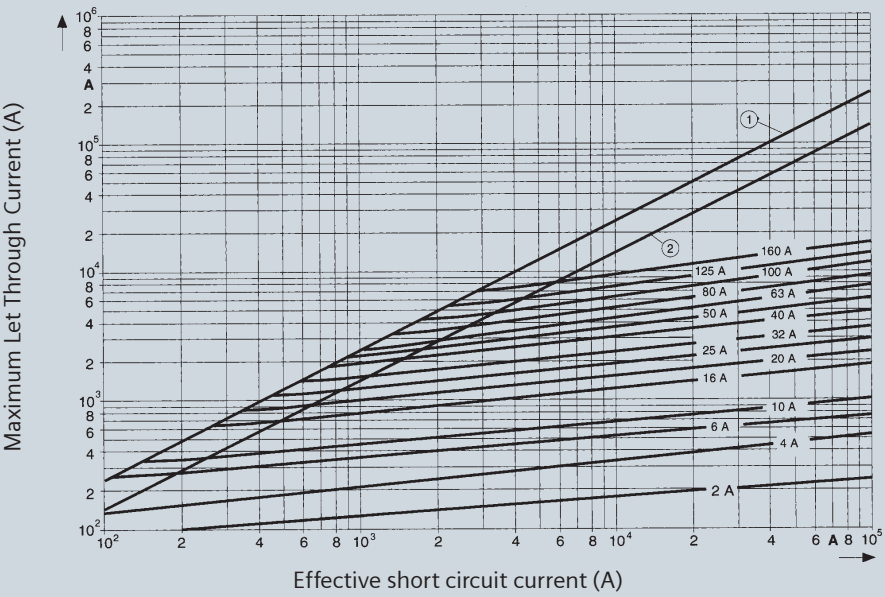

Characteristic Curves

LV HRC Fuse Links

Time-current characteristic chart


Range
3NA7 1

Size
1

Operating class
gG


Rated voltage
AC 500 V / DC 440 V

Rated current
50 - 250 A

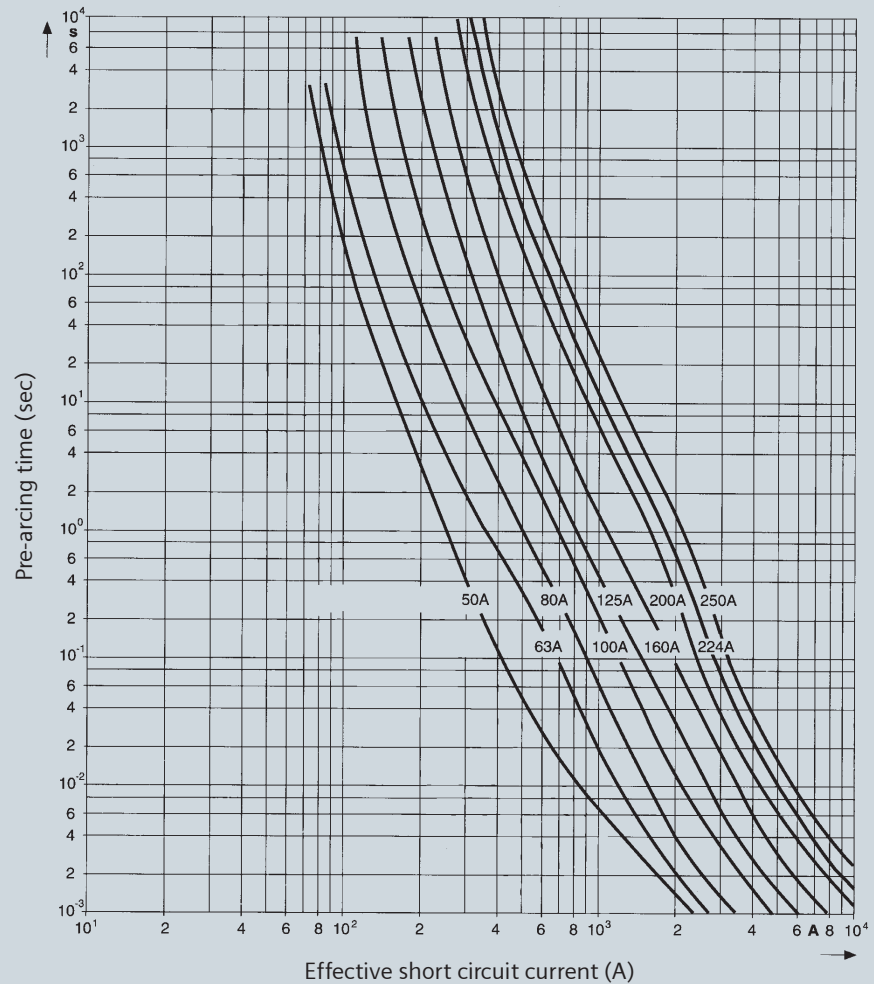


Peak let-through current chart

- ① Peak short circuit current with maximum DC component
- ② Peak short circuit current without DC component

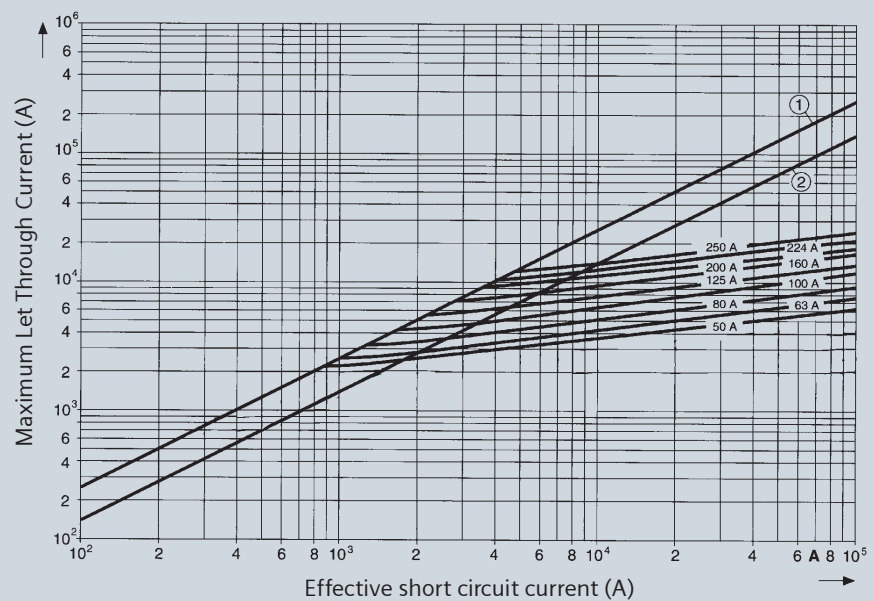

Characteristic Curves

LV HRC Fuse Links

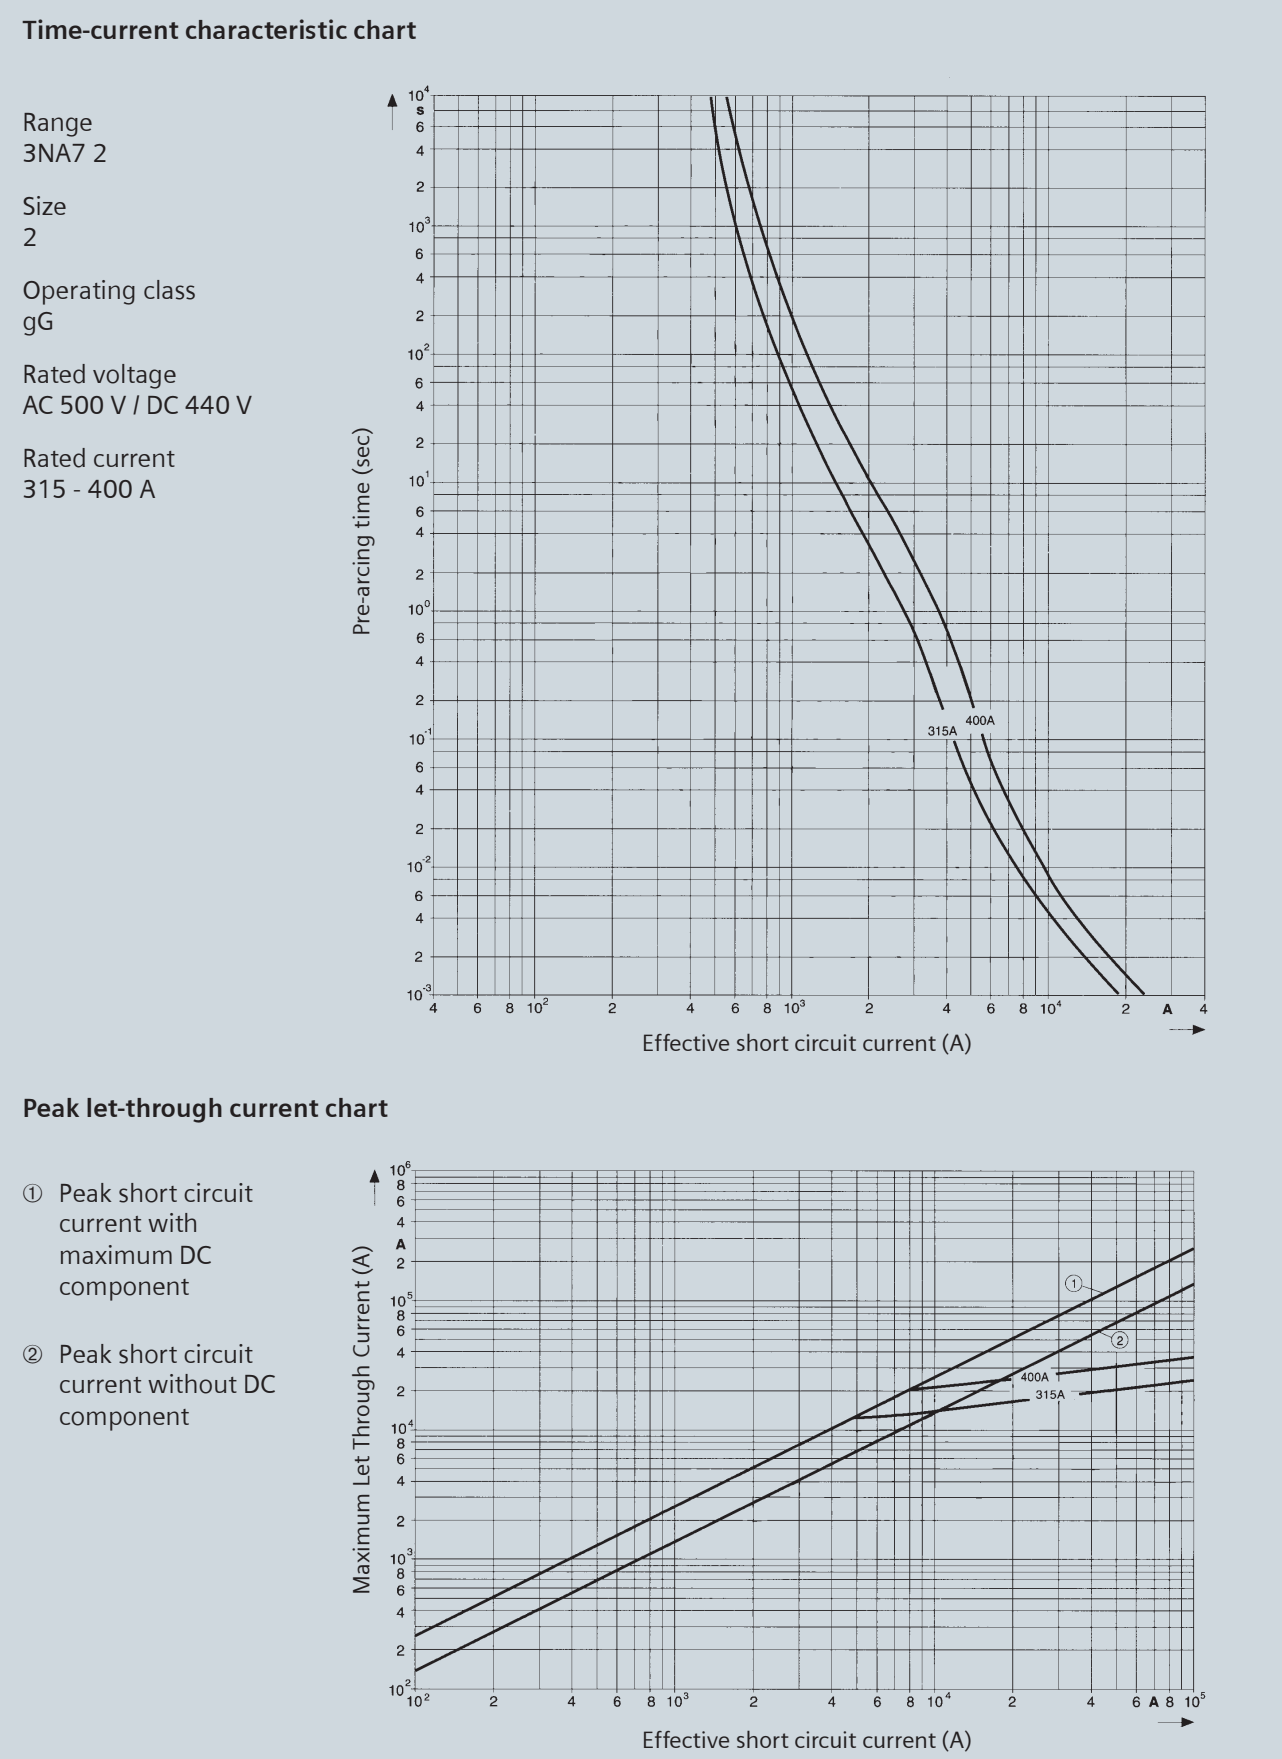

Characteristic Curves

LV HRC Fuse Links

Time-current characteristic chart


Range
3NA3 3

Size
3

Operating class
gG


Rated voltage
AC 500 V / DC440 V

Rated current
315 - 800 A

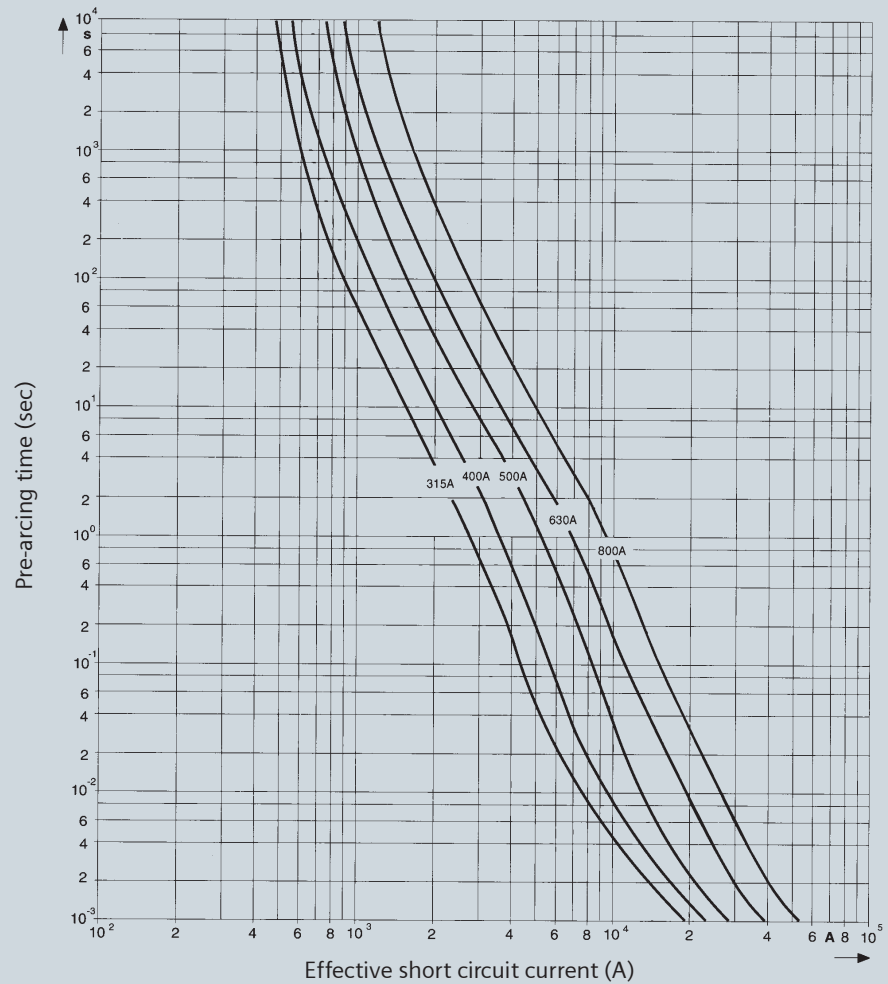

Peak let-through current chart


- ① Peak short circuit current with maximum DC component
- ② Peak short circuit current without DC component

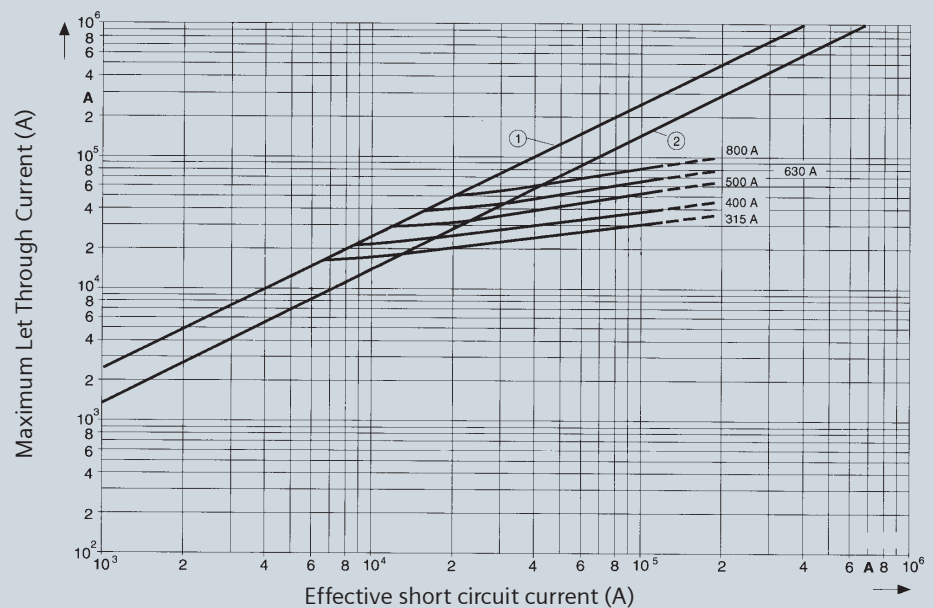


Characteristic Curves

Series : 3NA7 8...-6
Size : 00
Operational class : gG
Rated Voltage : 690 V AC/250 V DC
Rated current : 40... 100A

Time / current characteristics curves diagram

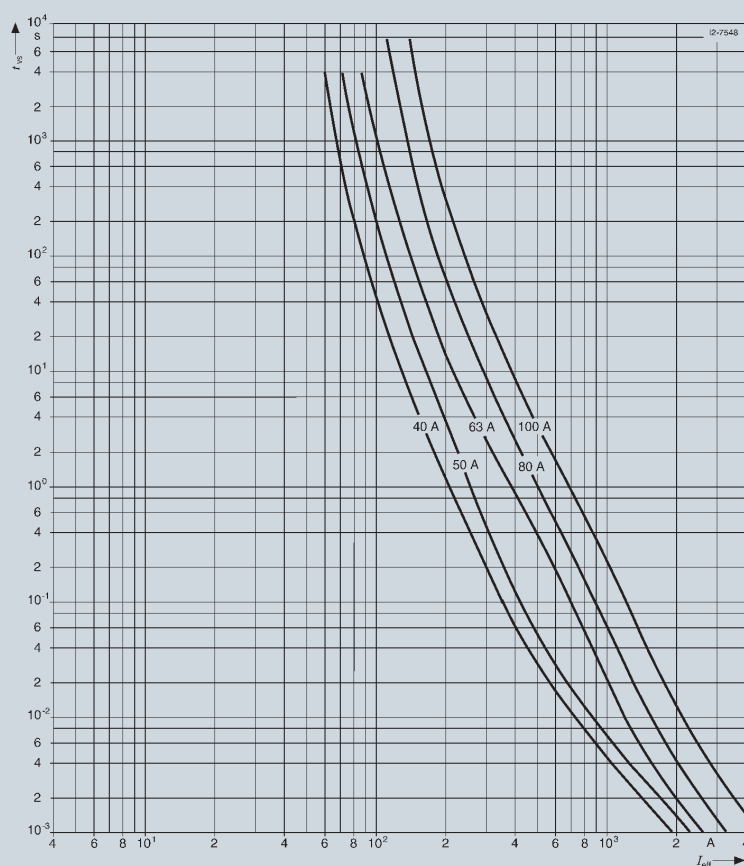

Current limitation diagram

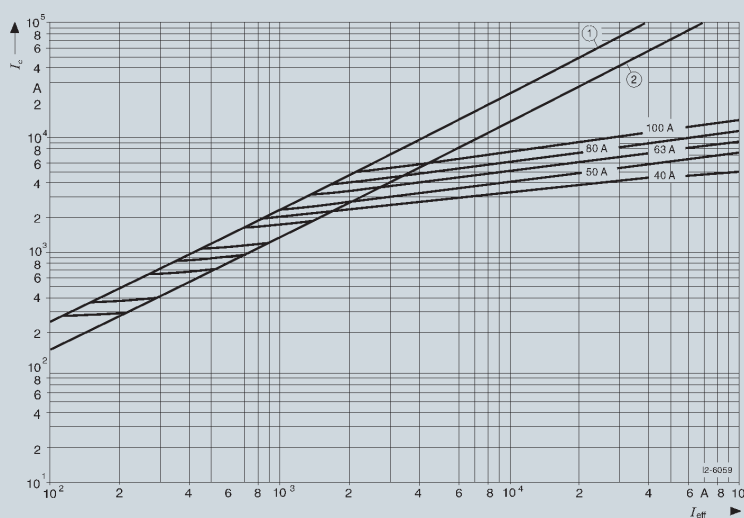


- ① Peak short circuit current with maximum DC component
- ② Peak short circuit current without DC component


Characteristic Curves

Series : 3NA7 1..-6
Size : 1
Operational class : gG
Rated Voltage : 690 V AC/440 V DC
Rated current : 125... 200A

Time / current characteristics curves diagram

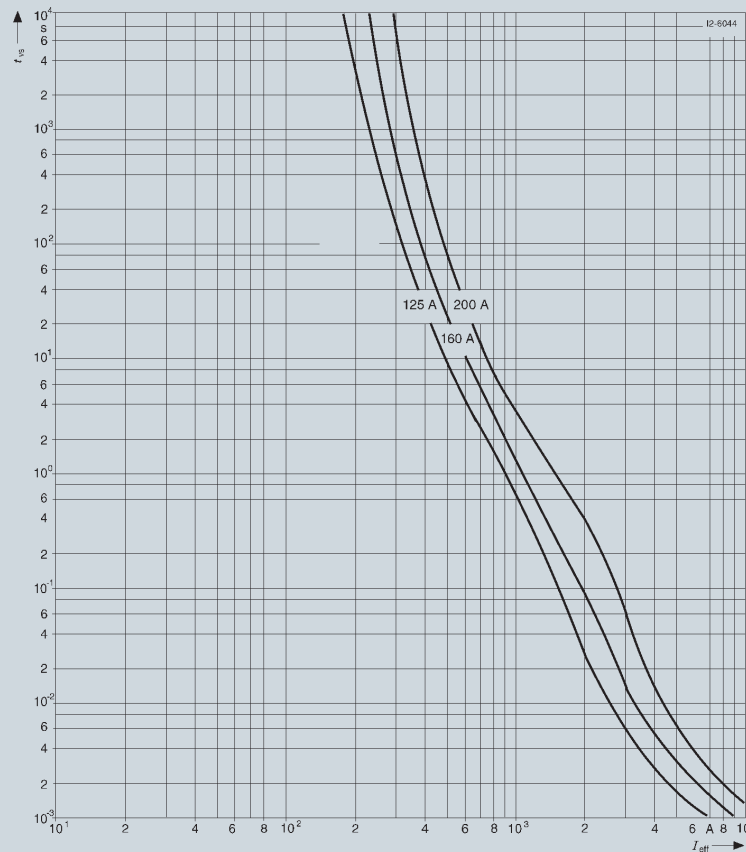

Current limitation diagram

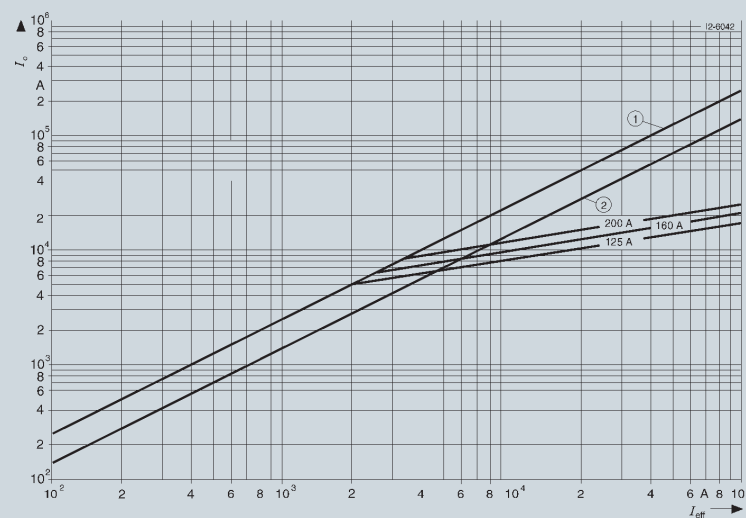


- ① Peak short circuit current with maximum DC component
- ② Peak short circuit current without DC component


Characteristic Curves

Series : 3NA7 2...-6
Size : 2
Operational class : gG
Rated Voltage : 690 V AC/440 V DC
Rated current : 250... 315A

Time / current characteristics curves diagram

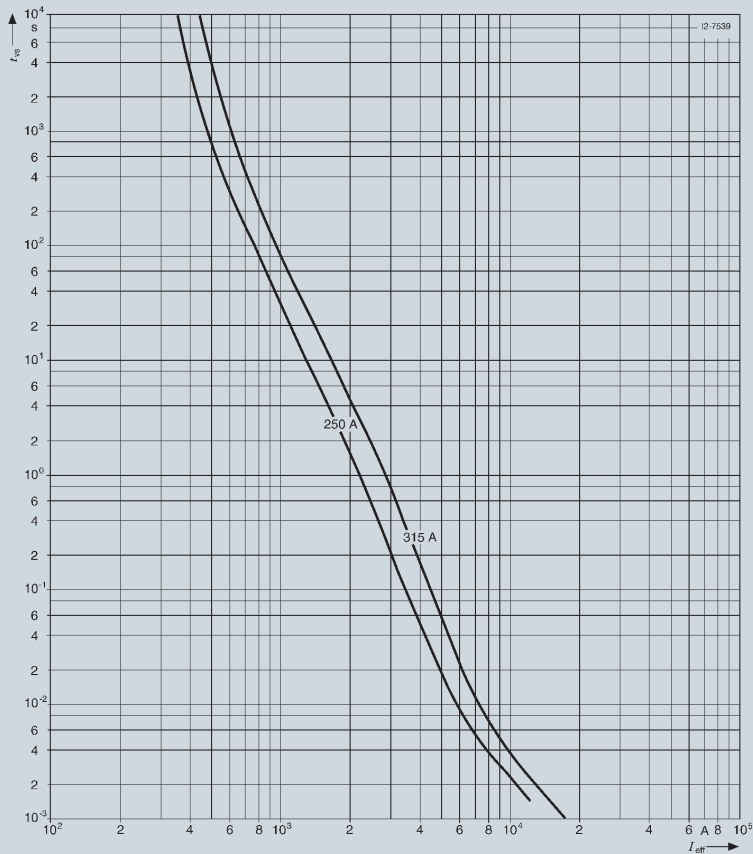

Current limitation diagram

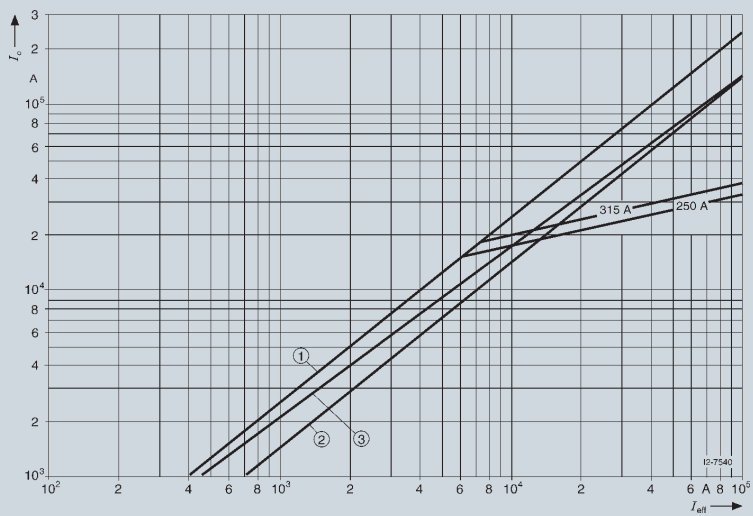


- ① Peak short circuit current with maximum DC component
- ② Peak short circuit current without DC component


Characteristic Curves

Series : 3NA3 3..-6
Size : 3
Operational class : gG
Rated Voltage : 690 V AC/440 V DC
Rated current : 400... 500A

Time / current characteristics curves diagram

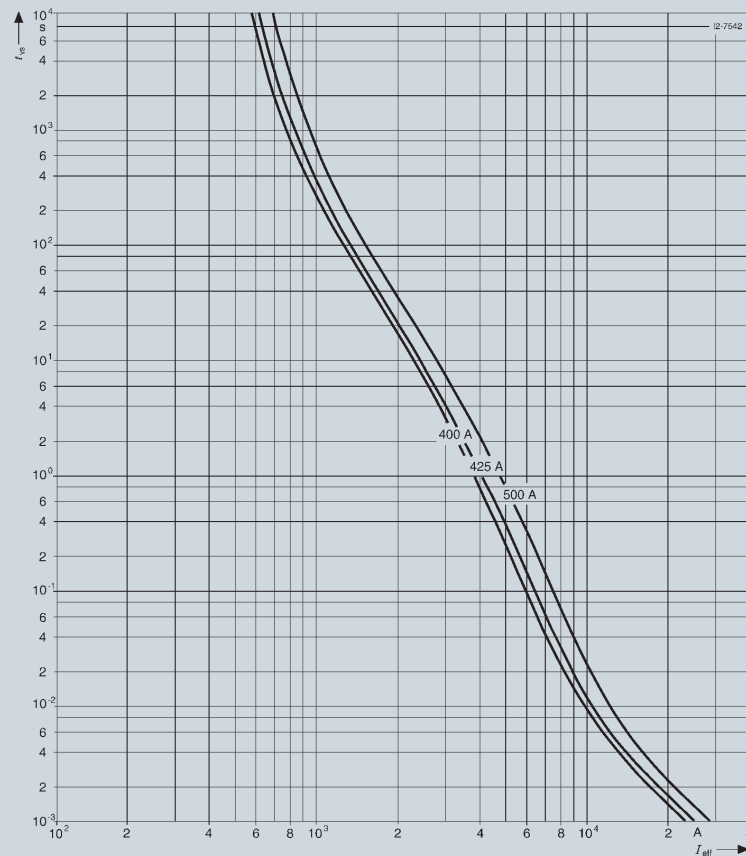


Current limitation diagram

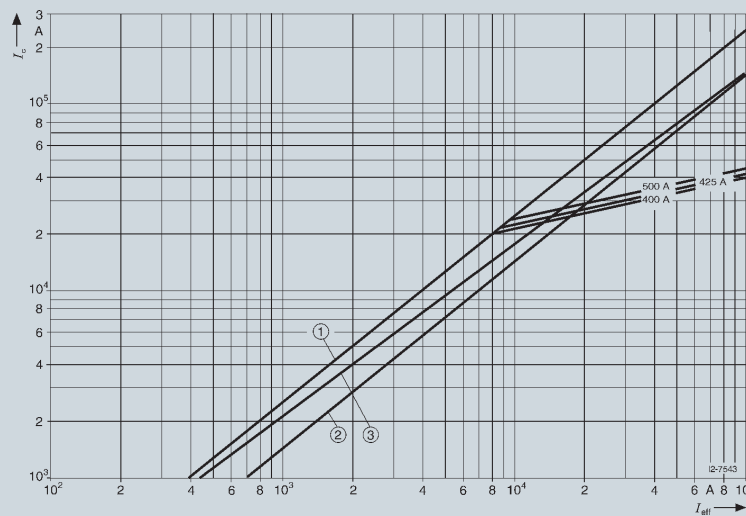


- ① Peak short circuit current with maximum DC component
- ② Peak short circuit current without DC component

Dimensions

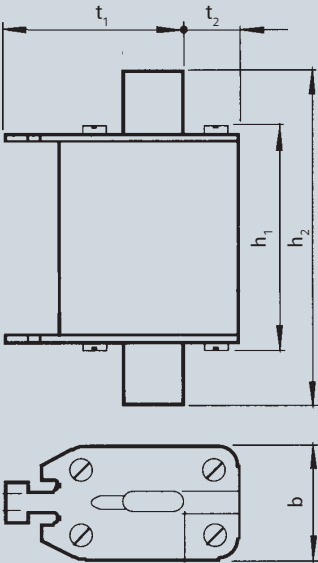


Sizes	Rating	MLFB	b	h_1	h_2	t_1	t_2
000	2A - 100A	3NA78...	21	54	80	45	8
00	125A - 160A	3NA78...	30	54	80	45	14
1	50A - 160A	3NA71...	30	75	137	50	15
1	200A - 250A	3NA71...	47	75	137	51	9
2	200A - 250A	3NA72...	47	75	151	58	10
2	315A - 400A	3NA72...	58	74	151	59	13
3	315A - 800A	3NA33...	71.2	74	151	69.5	12.8


3NA3 Fuse Bases

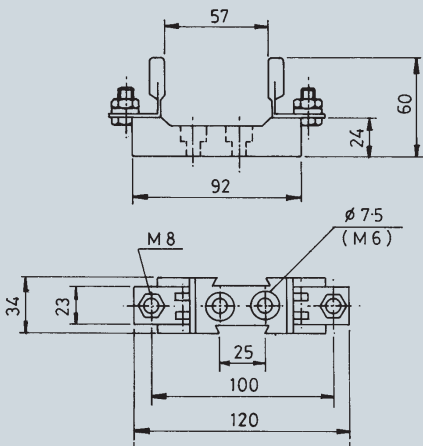


3NA3 030 (Size 00)

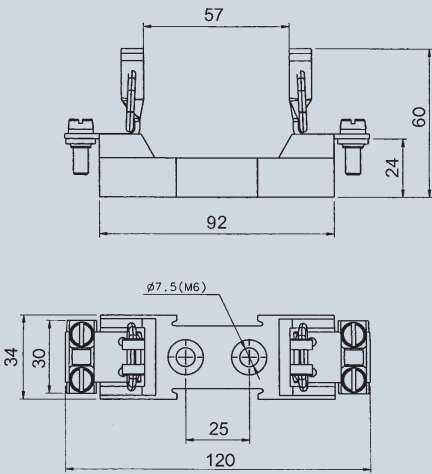

3NA3 032 (Size 00)

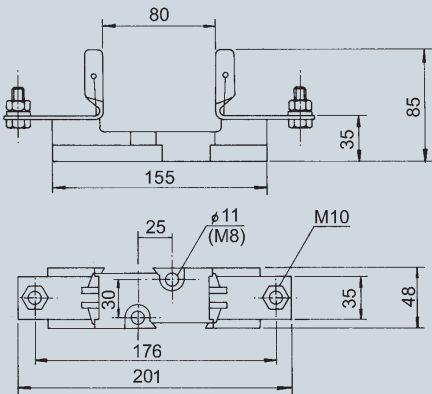


3NA3 230 (Size 1)

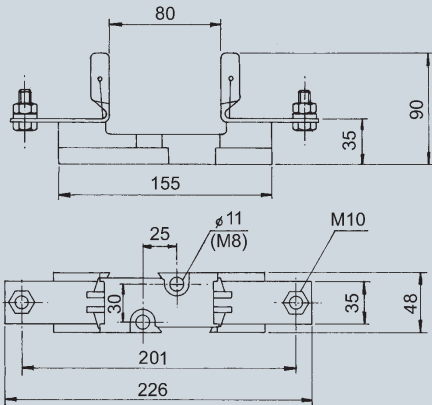


3NA3 330 (Size 2)

Dimensions

3NA3 Fuse Bases (Continuation)


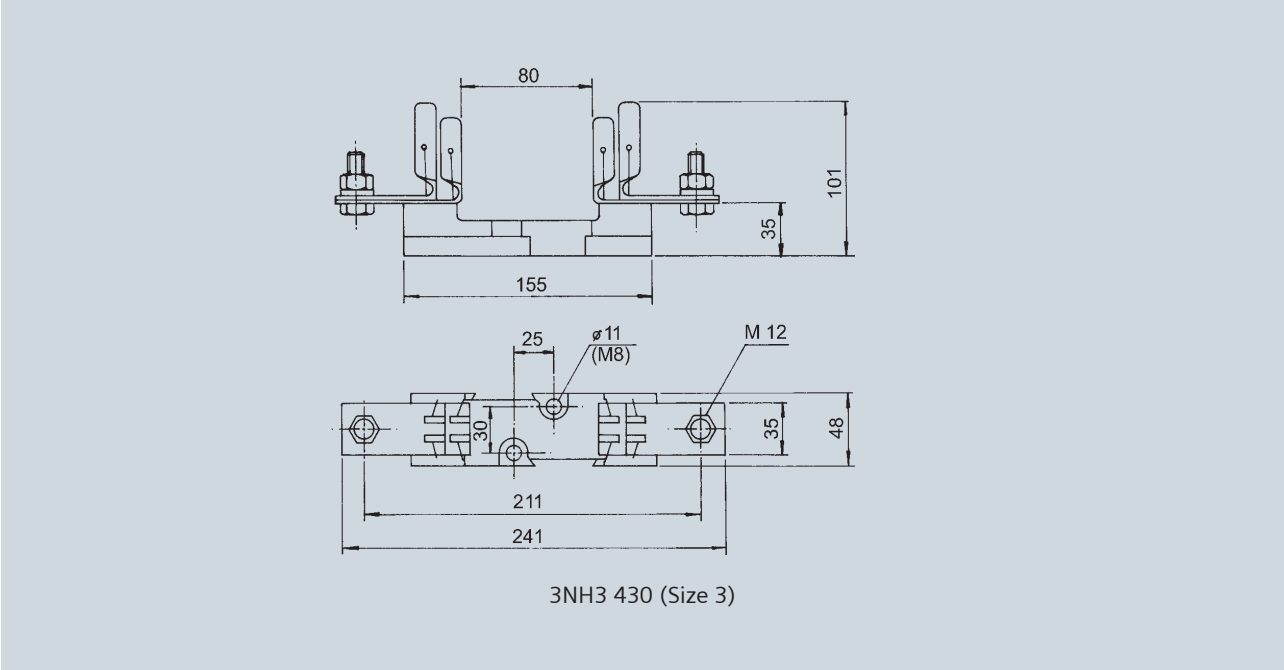


Isolating Links

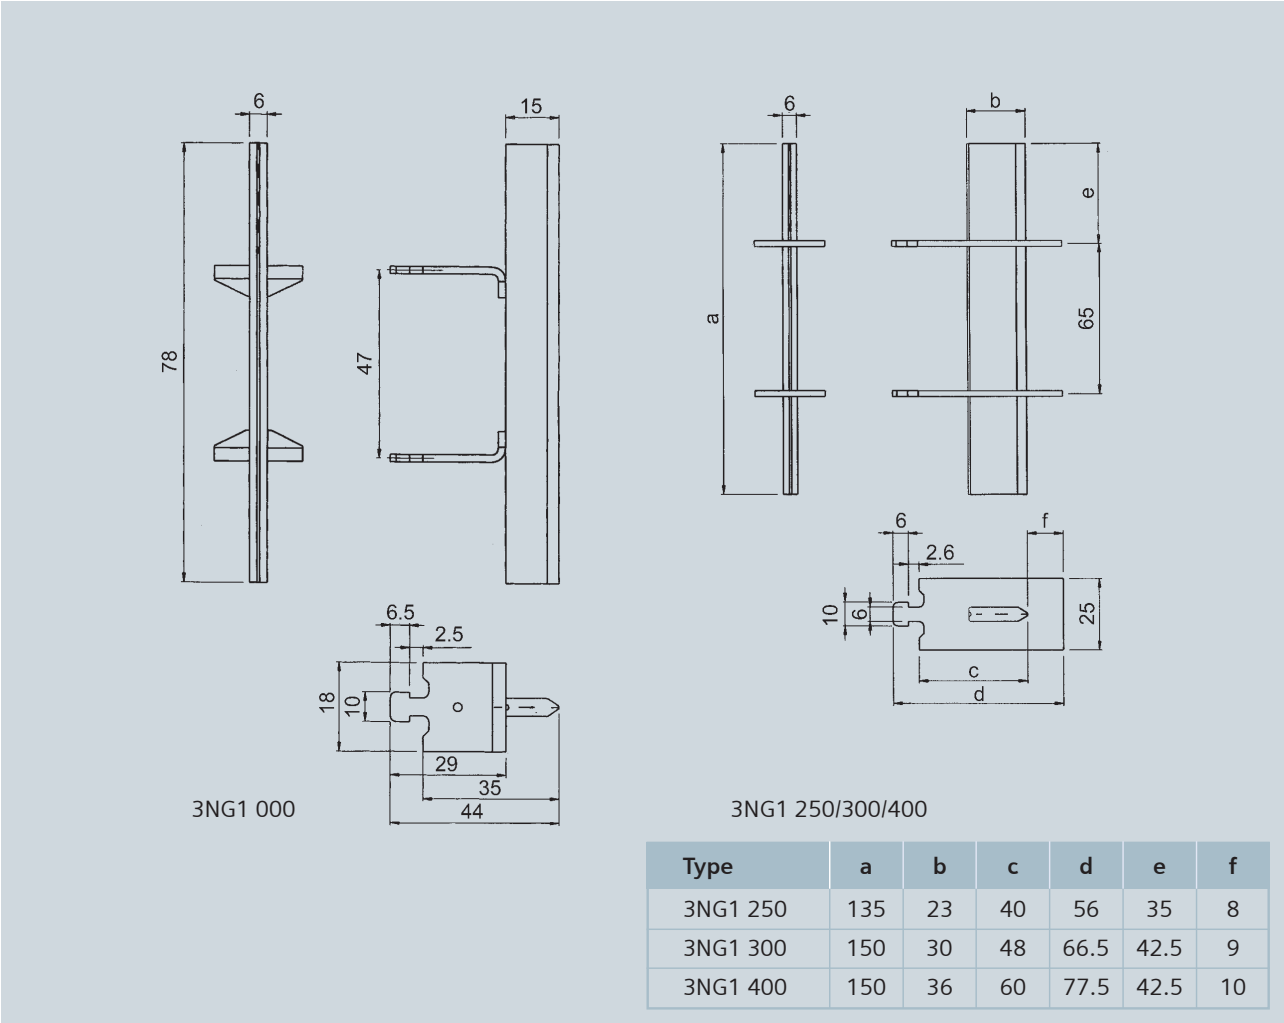

Dimensions

Insulated-handle fuse pullers

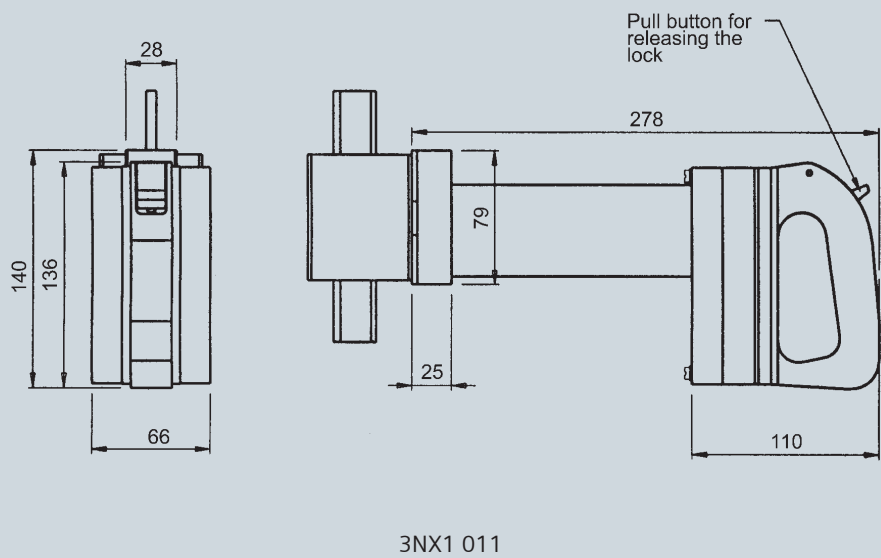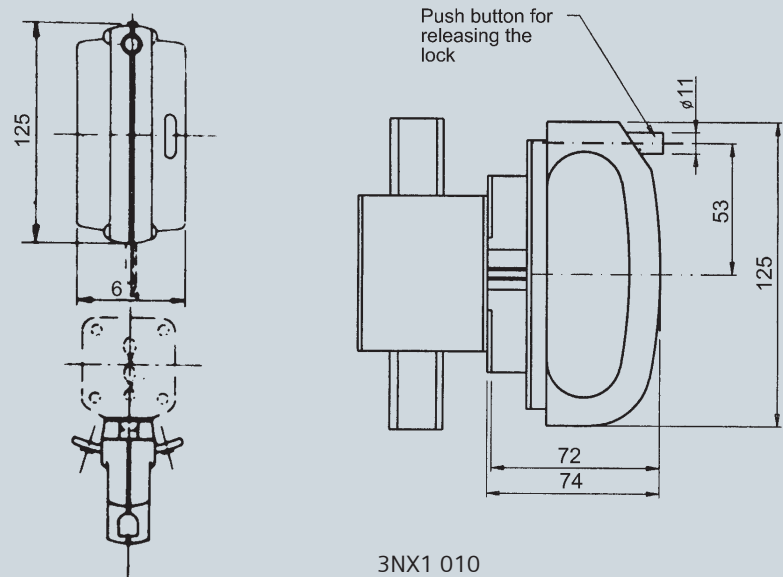

Notes

Your partners

WEST

Offices:

- **Ahmedabad** - 380009
3rd Floor, Prema Arbour
Girish cold drinks Cross Roads
Off. C. G. Road
☎ : +91 79 40207600
Fax: +91 79 40207699
- **Mumbai** - 400018
130, Pandurang Budhkar Marg, Worli
☎ : +91 22 24987000-02
Fax: +91 22 24987312
- **Nagpur** - 440010
5th Floor, Landmark Building, Ramdas Peth
☎ : +91 712 6633000
Fax: +91 712 6633111
- **Pune** - 411016
Tower B / 701 - 705, ICC Trade Tower
403A, Senapati Bapat Road
☎ : +91 20 2570 6000
Fax: +91 20 2570 6060

Territory managers :

- **Aurangabad** - 431210
A9, Yogeshwari Vrundavan
Nr. Malhar Chowk, Garkheda Parisar
Prema Nagar
Mobile: +91 9766316446
E-mail: santosh.rajhans@siemens.com
- **Baroda** - 390007
1st Floor Vanijya Bhavan, Race Course Road
☎ : +91 265 2325810 / 12, 6692110
Fax: +91 98255 06963
E-mail: sreejagannath.mohanta@siemens.com
- **Bhilai** - 490001
C/o Mr. S.H. Siddiqui
Sector -1, Street -9, Quarter No. 1A
Mobile: +91 98266 41970
E-mail: sandeep.barde@siemens.com
- **Indore** - 452001
521, Suniket Apartments
Shri Nagar Extension, Khajrana Main Road
Mobile: +91 98266 41970
E-mail: vineet.saxena@siemens.com
- **Kolhapur** - 416001
B-7, Mahagaonkar Complex
1147/E, Rajaram Road, Opp. Kamala College
☎ : +91 231 2536626
Mobile: +91 9822558876
E-mail: amol.pandit@siemens.com
- **Nashik** - 422101
8b, Shubhamangal Apartment
Chavan Mala, Nasik Road
Mobile: +91 9822193204
E-mail: nitinkumar.deshpande@siemens.com
- **Raipur** - 492007
Flat No. 103, First Floor, Block B
Shilp Enclave, Near LAS Colony
Shankar Nagar
Mobile: +91 9425057945
E-mail: brajesh.rathor@siemens.com
- **Rajkot** - 360005
D-3 Aalap Century, University Road
Mobile: +91 98255 06962
E-mail: bhushan.sawant@siemens.com
- **Surat** - 395004
59, Ground Floor, Shreejinnagar part-1
Dhabholi Char Rasta, Ved Road, Katargam
Mobile: +91 99250 01779
E-mail: chandrakant.keshrani@siemens.com
- **Vapi** - 396195
Flat No. 302, Samrajaya IV
Royal Residency, Charwada Road
☎ : +91 260 6451156
Mobile: +91 98251 47957
E-Mail: siemens_vapi@sancharnet.in

SOUTH

Offices:

- **Bangalore** - 560001
1st Floor, Jyothimahal, #49, St. Marks Road
☎ : +91 80 22042000
Fax: +91 80 22224131
- **Chennai** - 600034
4, Mahatma Gandhi Road
☎ : +91 44 28334000
Fax: +91 44 28334088
- **Coimbatore** - 641018
7th Floor, East Wing, Global Towers
1057, Avinashi Road
☎ : +91 422 4336300
Fax: +91 422 4336310
- **Hyderabad** - 500004
5-9-19, Lakshmi Narsinh Estate, 4th Floor
Secretariat Road, Opp. Secretariat, Saifabad
☎ : +91 40 23482500
Fax: +91 40 23243145

Territory managers :

- **Belgaum** - 590003
H/No 713, Narvekar Lane
Shahapur, Karnataka
☎ & Fax: +91 831 2495156
Mobile: +91 9740277991
E-mail: anand.gawade@siemens.com
- **Cochin** - 682016
K.G. Oxford Business Centre
39/4609, 3rd Floor, Sreekanadath Road
Ravipuram
☎ : +91 484 4028611/22/33/44
Fax: +91 484 2380201
E-mail: sajeen.s@siemens.com
- **Madurai** - 625010
8/12, Ground Floor
Sakthi Vellammal Street, S.S.Colony
☎ : +91 452-2601751
Mobile: +91 98946 17780
- **Pondicherry** - 605001
32, Second Floor, St. Theresa Street
☎ & Fax: +91 413 4500101
Mobile: +91 9840472727
E-mail: elankumarak.pandian@siemens.com
- **Salem** - 636 008
3/25, Santhosh Nagar, PACB Back Side,
Chinnathirupathi
Mobile: +91 98946 17772
E-mail: rubengerald@yahoo.com
- **Tiruchirappalli** - 620017
T3, Illrd Floor
Vishranthi Daffodils Apartments
Opp: Friends Eye Hospital, Puthur
☎ : +91 431 4030390
Fax: +91 431 4030390
Mobile: +91 9444911221
E-mail: Akhilesh.Nair@siemens.com
- **Trivandrum**
Skyline City Villa, House No-8, Vetamukku
Mobile: +91 98959 79604
E-Mail: jonsa_82@yahoo.com
- **Vijayawada** - 520010
G-2, Shreya Towers, Moghalrajapuram
Near Jammichettu Centre
☎ : +91 866 6629933
Mobile: +91 9866463639
E-mail: santosh.p@siemens.com
- **Visakhapatnam** - 530003
B4, Mount Moriah Residency
Waltair Uplands
☎ : +91 891 2712535
Mobile: +91 98492 12555
E-mail: siemensvizag@rediffmail.com

NORTH

Offices:

- **Chandigarh** - 160017
SCO 189 - 191, 3rd Floor, Sector 17C
☎ : +91 172 4690300
Fax: +91 172 4690399
- **Lucknow** - 226001
28/45, Ashok Marg, Opposite Indira Bhawan
☎ : +91 522 4031022, 4031000
Fax: +91 522 4031019
- **New Delhi** - 110002
4A, Ring Road, I.P. Estate
☎ : +91 11 42995000-09
Fax: +91 11 42995030

Territory managers :

- **Bareilly** - 243001
Flat No. T1, 129, Civil Lines
Mobile: +91 9897019061
E-mail: siemens.bly@gmail.com
- **Dehradun** - 248001
122, Ashok Vihar, Lane no.1, Ajabpur Kalan
Mobile: +91 97600 33117
E-mail: manish.bajpai@siemens.com
- **Faridabad** - 121006
House No. 237, Sector 8, Faridabad
Mobile: +91 9873696350
E-mail: ramit.mehra@siemens.com
- **Gurgaon** - 122001
117-C, First Floor, Sector-30
Behind Jalvayu Vihar
Mobile: +91 99710 91588
Email: siemens.ggn@gmail.com
- **Hardwar** - 249407
758, 1st floor, Model Colony
Awasth Vikas, Jwalapur
Fax: +91 1334 - 265491
Mobile: +91 9897070133
E-mail: naveen.khare@siemens.com
- **Jalandhar** - 144001
H. No. 448R, First Floor, Pushpa Niwas
Near Geeta Mandir, Model Town, Punjab
Mobile: +91 9779194445
E-mail: ankush.saini@siemens.com
- **Jodhpur** - 342008
371, Gouri House
Kamala Nehru nagar, Near SBI Bank
☎ : +91 291 2760371
Mobile: +91 98283-27200
E-mail: Naveen.sahariya@siemens.com
- **Kota** - 324002
48, Model Town, Khedi Pkatak, Rajasthan
☎ : +91 744 2340523
Mobile: +91 9784842605
E-mail: ajit.parashar@siemens.com
- **Ludhiana** - 141009
H. No.3127, Urban Estate
Sector 38, Chandigarh Road
Mobile : +91 9876047929
E-mail: sunil.singla@siemens.com
- **Ludhiana** - 141004
H. No. 281, 1st Floor, E Block, B.R.S. Nagar
Mobile: +91 9872000936
E-Mail: singh.harpal@siemens.com
- **Ludhiana** - 141004
H.No. 3996, 1st Floor, Sector 32A
Urban Estate, Chandigarh Road
☎ & Fax: +91 161-5017741
Mobile: +91 9815130172
E-Mail: nitinbansal@siemens.com
- **Jaipur** - 302006
6, Park Street, Opp. Pink City Petrol Pump
M.I. Road, Rajasthan
☎ : +91 141 2370274, 2377956
Fax: +91 141 2370482
Mobile: +91 9829244313
E-mail: peesh.gupta@siemens.com

- **Kanpur** - 208013
106, Agarwal Apartments,
Near Hari Har Dham Mandir
Shyam Nagar, Uttar Pradesh
☎ & Fax: +91 512 2423348
Mobile: +91 9839102434
E-mail: siemens_knp@satyam.net.in
- **Renukoot** - 231217
Above ICICI Prudential office, Patel Nager
Murdhawa, Distt. Sonbhadra, U.P.
Mobile: +91 9838007897
E-mail: siemens_upeast@sify.com
- **Udaipur** - 313001
303, Oasis Park, PP singhal Marg
Ambavgarh
☎ : +91-294-2430345
Fax: +91-294-2430345
Mobile: +91 9829039120
E-mail: ankur.singh@siemens.com

EAST

Offices:

- **Kolkata** - 700042
43 Shanti Palli, R B Connector
Eastern Metropolitan Bypass
☎ : +91 33 24449000, 24428641-47
Fax: +91 33 24449010 / 13

Territory managers :

- **Bhubaneswar** - 751002
109, Haripriya Apartment
Vivekananda Marg
☎ : +91 674 3200627
Mobile: +91 9937009749
E-mail: anirban.aditya@siemens.com
- **Bhubaneswar** - 751013
Flat No. - E 303, "Jyotsna Enclave"
(Beside Hotel Mayfair) Jaydev Vihar
Mobile: +91 9337058366
E-mail: shounak.pal@siemens.com
- **Durgapur** - 713216
4/6, Matangini Hazra Bithi
Ground floor, City center
☎ : +91 343 2605286
Mobile: +91 9830185007
E-mail: sourav.paul@siemens.com
- **Guwahati** - 781003
G1, Hill View Apartment, Navagraha Path
Chenikuthi Hill Side
☎ : +91 361 2663988
Mobile: +91 9864037562, 9864110684
E-mail: amarnath.karmakar@siemens.com,
biplab.datta@siemens.com
- **Jamshedpur** - 831005
1511, Kirthar Apartment
Vijaya Heritage, Uliyan, Kadma
☎ : +91 657 6451637
Mobile: +91 9934311352
E-mail: shaibal.pariial@siemens.com
- **Ranchi** - 834001
Flat No. 403, Rishab Tower
Near Line Tank, Behind Firayalels
E-mail: sourav.dasgupta@siemens.com
- **Rourkela** - 769004
T-15 Civil Town
☎ : +91 661 2401724
Mobile: +91 9437041724
E-mail: sanjoy.ganguly@siemens.com
- **Sambalpur** - 768 004
Pradhan Para, Near Jamkani Mandir
Back side of LIC Div Off, Airhapali, Orissa
☎ : +91 663 2541258
Mobile: +91 094385 29778
E-mail: samir.chintak@siemens.com

Siemens Ltd.

Automation and Drives - Motors

Electrical Installation Technology

Thane Belapur Road

Thane 400601

Fax : +91 22 27623729

E-mail : A&D-BDCD.in@siemens.com

Customer Care Toll free no. 1800 220 987. Email: adscs.india@siemens.com

Siemens Ltd.

ET-01-014-004

Product upgradation is a continous process. Hence, data in this booklet is subject to change without prior notice. For the latest information, please get in touch with our Sales Offices.